

VAL lighting

Technologie Die Verbindet

CONTACT

- [https:// www.vallighting.com](https://www.vallighting.com)

Address: Maybachstraße 37, 51381
Leverkusen, Germany

EMAIL: contact@vallighting.com



2025

Lighting Application and Product Manual

Super Mini Series



Diameter 23MM
Super mini, exquisitely compact



- Light Shapes
- Focus
- Beam Angle 18°-36°

Cabinet Precise Lighting

Focus on highlighting the exhibits

jewelry | luxuries | museum | gallery



Display within the jewelry cabinet




Display within the luxury goods cabinet



Focus on highlighting the



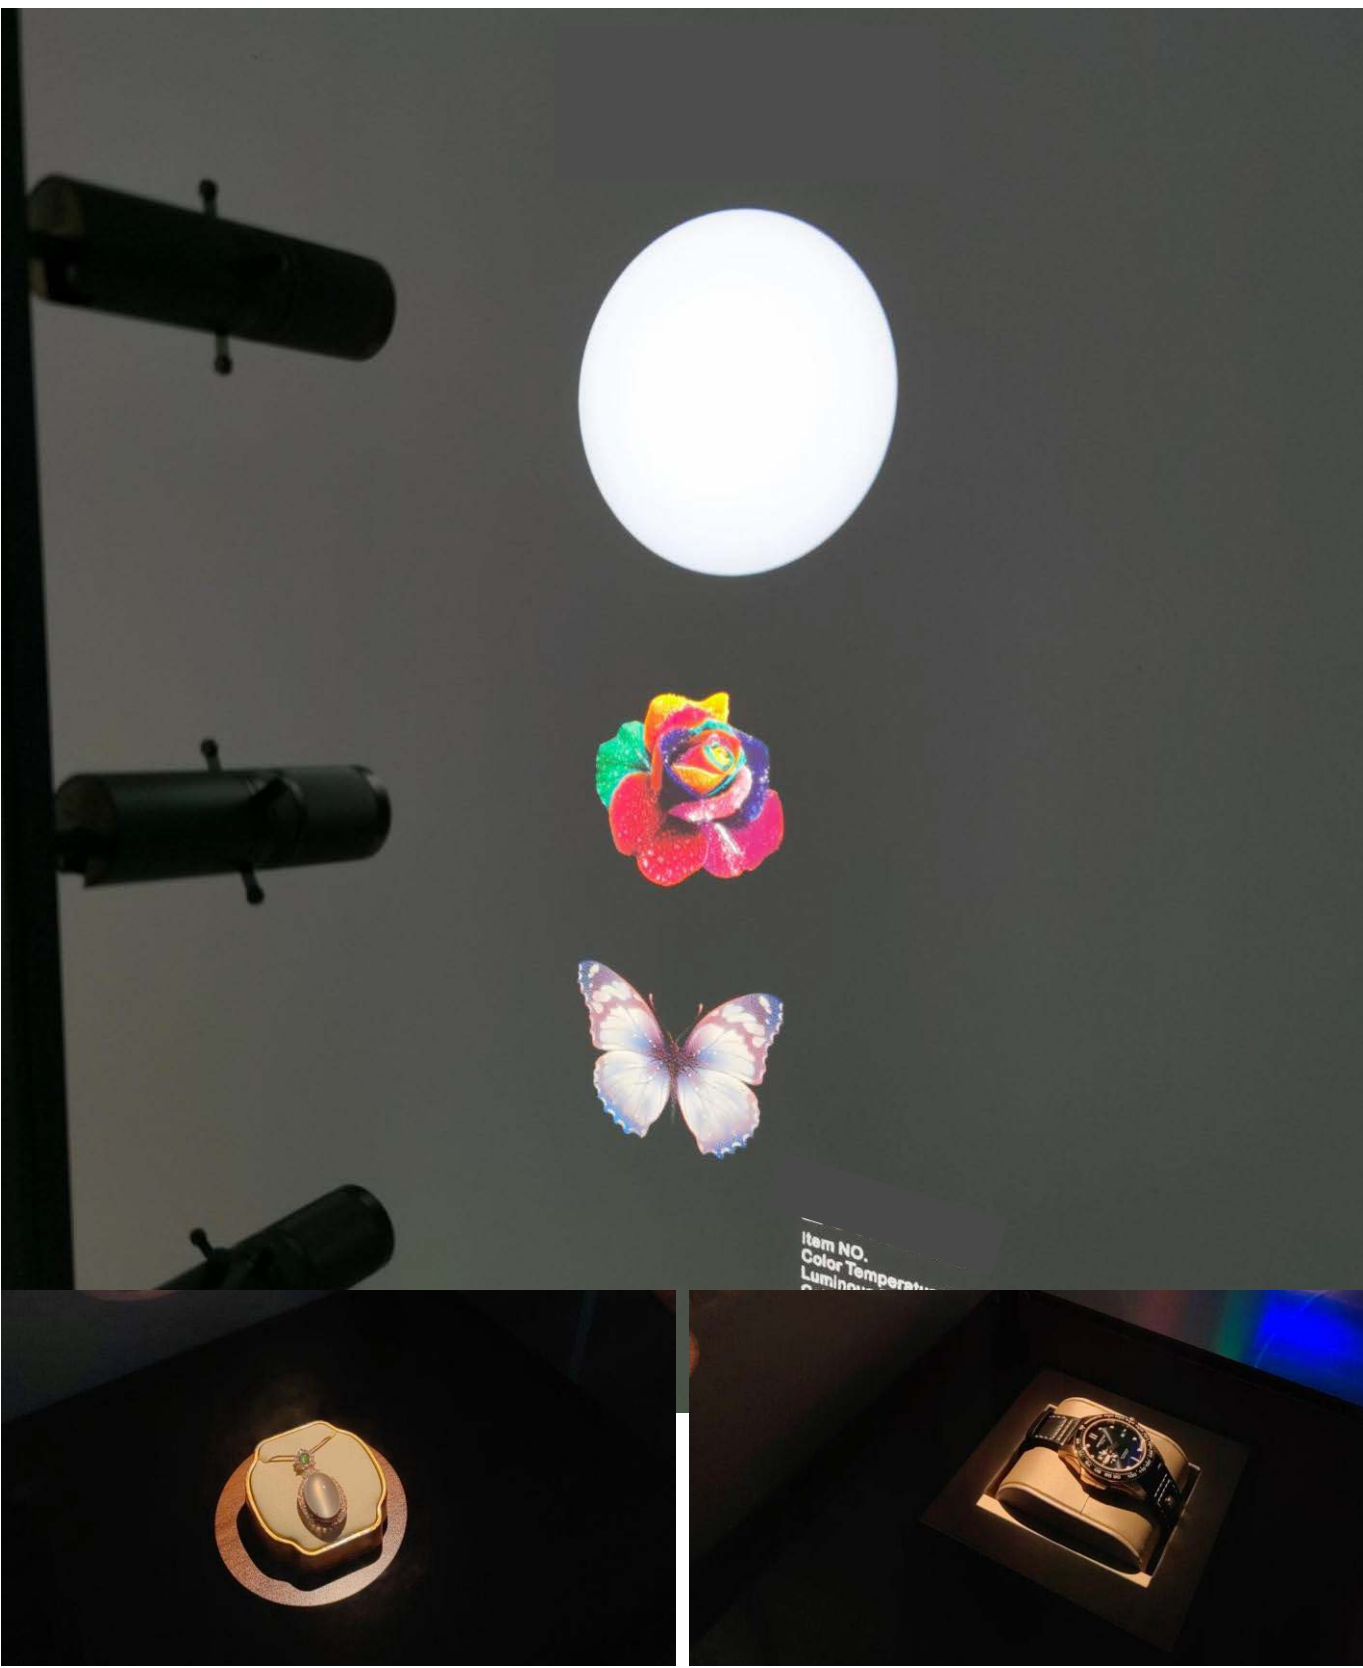


SuperMini Series



SD18-Spotlight

Color
Color can be customized

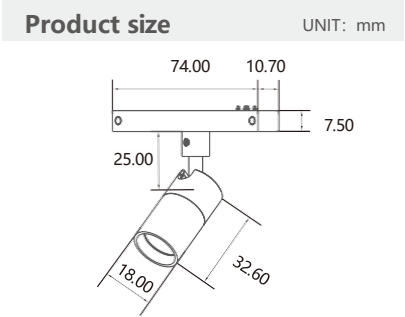


Product parameters	Model No.	Power	CCT	CRI	Beam Angle
	SD18-S	1.5W	2700K 3000K 3500K 4000K	Ra97 Typ.	24°

Installation Way



Installation Category	MT10 Track	STUCCHI Track	Surface Mounted	Recessed
Input Voltage	DC 24V	DC 48V	AC 100-240V 50/60Hz	AC 100-240V 50/60Hz
Control Way	Dimming-Onboard	DALI/CASAMBI	NO Dimming	NO Dimming

Light Distribution

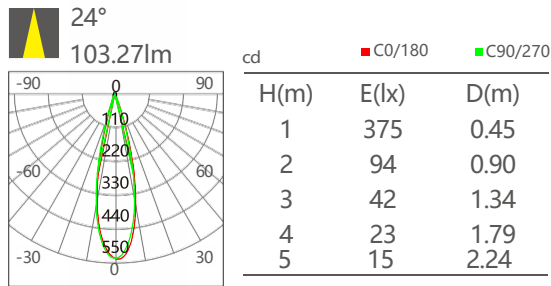


SuperMini Series



SD23-Spotlight

Color
Color can be customized

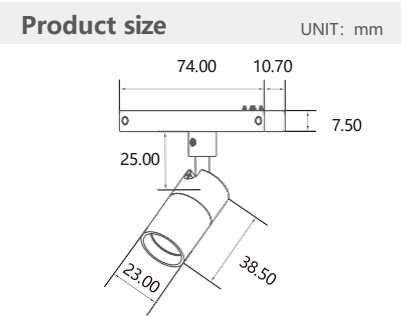





Product parameters	Model No.	Power	CCT	CRI	Beam Angle
	SD23-S	3W	2700K 3000K 3500K 4000K	Ra97 Typ.	15° 24° 36° 50°

Installation Way



Installation Category	MT10 Track	STUCCHI Track	Surface Mounted	Recessed
Input Voltage	DC 24V	DC 48V	AC 100-240V 50/60Hz	AC 100-240V 50/60Hz
Control Way	Dimming-Onboard	DALI/CASAMBI	NO Dimming	NO Dimming

Light Distribution

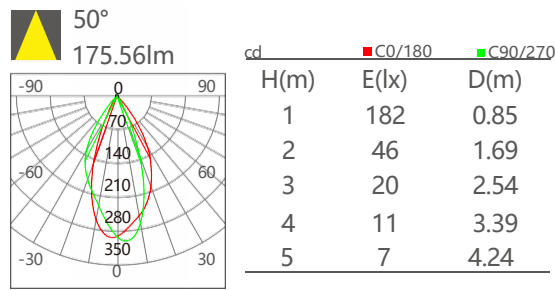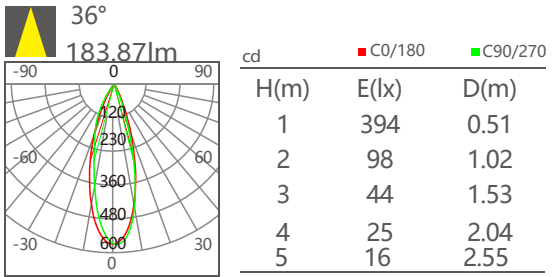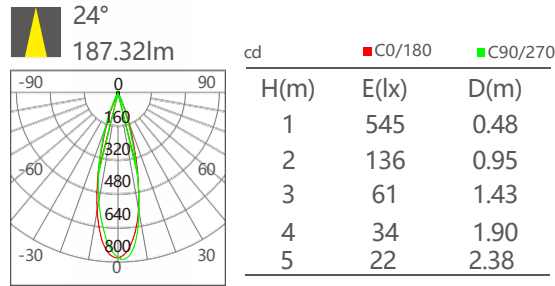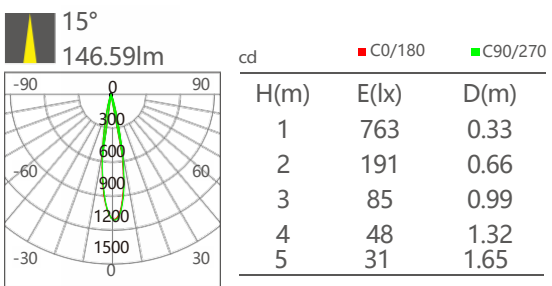


SuperMini Series



SD23-Zoom Spotlight

Color
Color can be customized

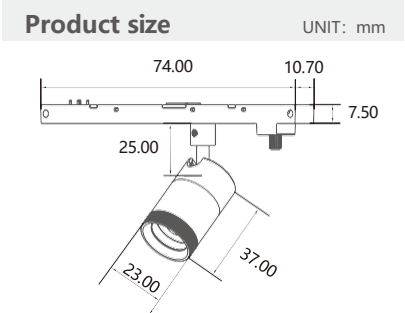

Product parameters	Model No.	Power	CCT	CRI	Beam Angle
	SD23-Z	3W	2700K 3000K 3500K 4000K	Ra97 Typ.	15°-35°



Installation Way



Installation Category	MT10 Track	STUCCHI Track	Surface Mounted	Recessed
Input Voltage	DC 24V	DC 48V	AC 100-240V 50/60Hz	AC 100-240V 50/60Hz
Control Way	Dimming-Onboard	DALI/CASAMBI	NO Dimming	NO Dimming

Light Distribution

Ra97 Typ.
4000K

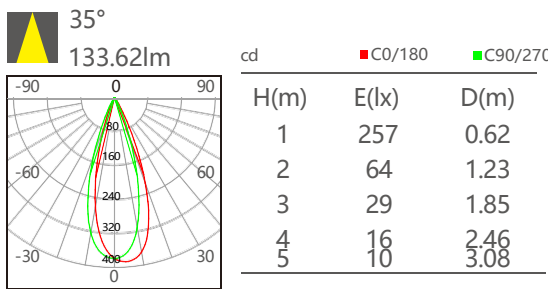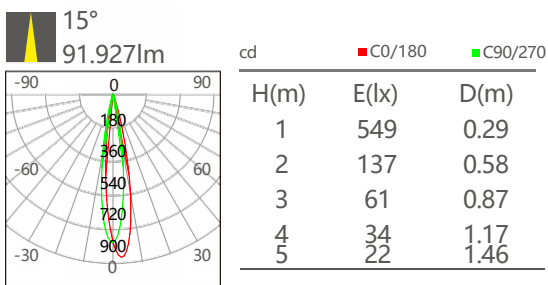


SuperMini Series



VF2303-Zoomable Framing Gobo Light

Color
Color can be customized

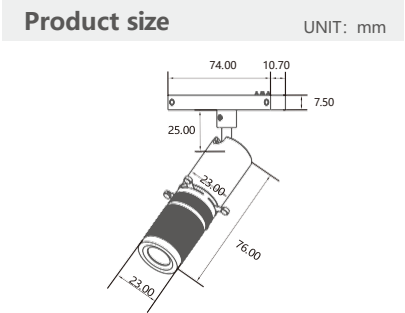

Product parameters	Model No.	Power	CCT	CRI	Beam Angle
	VF2303-1836	3W	2700K 3000K 3500K 4000K	Ra97 Typ.	18°-36°





Installation Way



Installation Category	MT10 Track	STUCCHI Track	Surface Mounted	Recessed
Input Voltage	DC 24V	DC 48V	AC 100-240V 50/60Hz	AC 100-240V 50/60Hz
Control Way	Dimming-Onboard	DALI/CASAMBI	NO Dimming	NO Dimming

Light Distribution

Ra97 Typ.
4000K

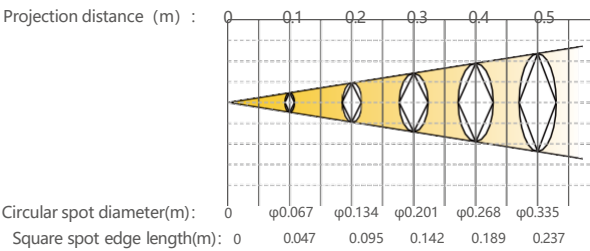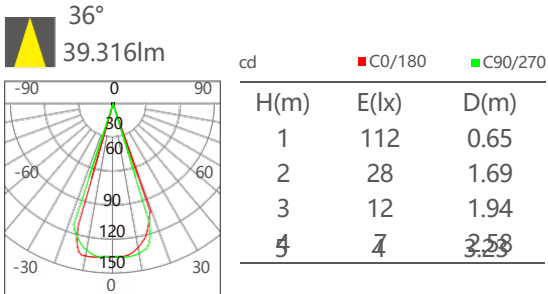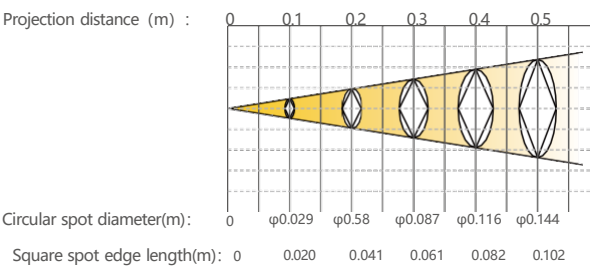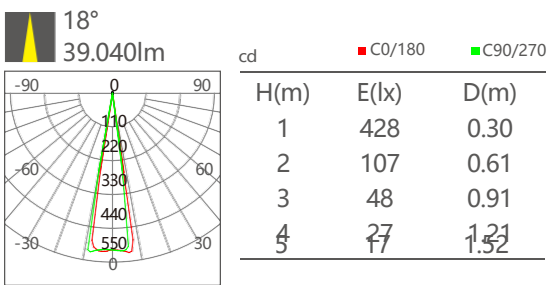

All New Magic One Series



Magic One Series Multifunctional Combined Lighting

The same light source body can be matched with different optical components such as fixed lens, zoom lens, and framing . At the same time, various optical accessories can be arbitrarily superimposed to achieve flexible, diverse, and easy personalized combinations, fully meeting the lighting needs of different customers for various scenarios. In particular, it can meet the small-batch and diverse customization needs of customers.



Magic One Series




M3

Color
Color can be customized



Product size UNIT: mm



Product parameters

Model No.	Power	CCT	CRI	Beam Angle
M3	10W	2700K	ON/OFF Ra97 Typ. CCT ADJUSTABLE Ra90 Typ.	10°
		3000K		15°
		3500K		20°
		4000K		30°
		2700~5700K		45°
				10-50°
				20-35°
				55°

Installation Way



Installation Category

Recessed	Surface Mounted	Magnetic Track	Track Mounted	Integrated Driver
----------	-----------------	----------------	---------------	-------------------

Input Voltage

DC 48V/AC 100-240V 50/60HZ

Control Way

Dimming-Onboard/0-10V/DALI/DMX/CASAMBI/ZIGBEE/Bluetooth




Class 1 Optical Accessories								
	Fix Lens Module	Zoom Lens Module	Framing Fix Lens Module	Framing Zoom Lens Module				
Class 2 Optical Accessories								
	Oval Lens	Softening Lens	Wall Washing Lens	Honey Comb	CCT Filter	UV Filter	Gradient Filter	ND Filter
Class 3 Optical Accessories								
	Medium Snoot	Half Snoot	Full Snoot	Four Barndoor				

Magic One Series


Light Distribution

Ra97 Typ./4000K


Fix Lens Module

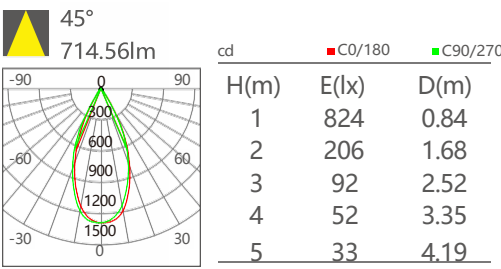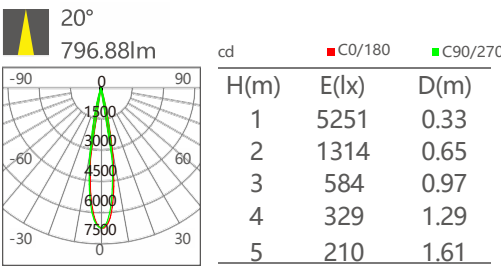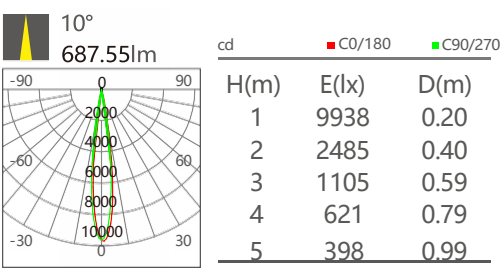





Zoom Lens Module

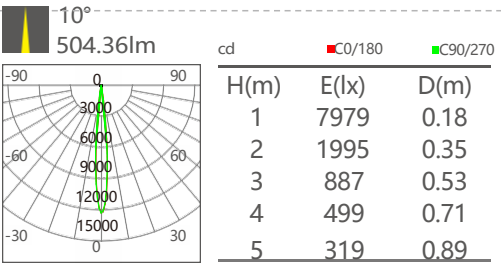

Framing Zoom Lens Module

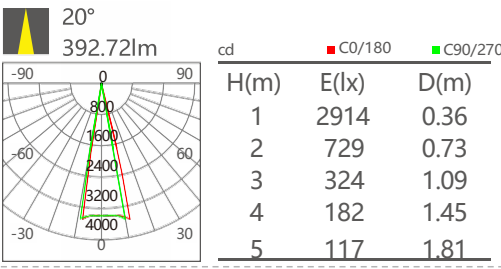

Framing Fix Lens Module

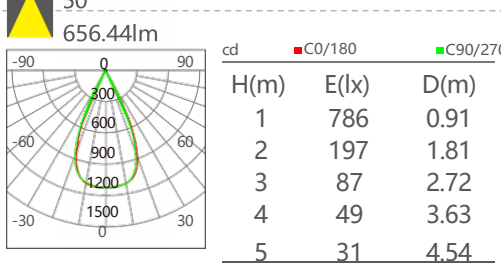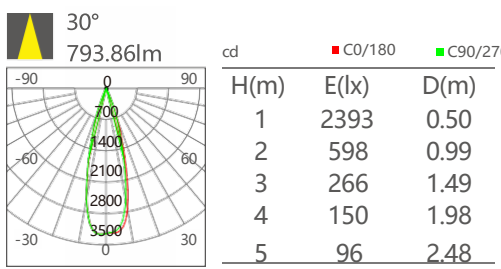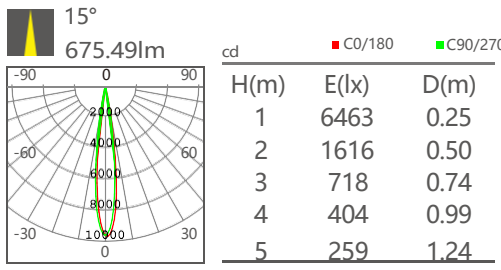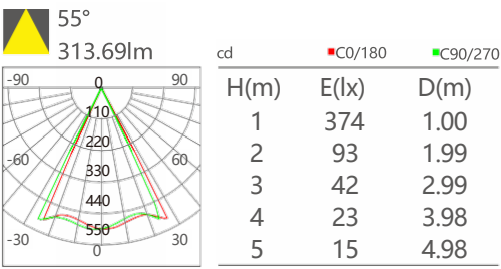


Magic One Series



M5
Color
Color can be customized



Product size UNIT: mm



Product parameters	Model No.	Power	CCT	CRI	Beam Angle
	M5	20W	2700K 3000K 3500K 4000K 2700~5700K	ON/OFF Ra97 Typ. CCT ADJUSTABLE Ra90 Typ.	10° 15° 20° 30° 40° 10-50° 18-36°

Installation Way



Installation Category	Recessed Surface Mounted Magnetic Track Track Mounted Integrated Driver
Input Voltage	DC 48V/AC 100-240V 50/60HZ
Control Way	Dimming-Onboard/0-10V/DALI/DMX/CASAMBI/ZIGBEE/Bluetooth






Class I Optical Accessories	 Fix Lens Module	 Zoom Lens Module	 Framing Zoom Lens Module					
Class 2 Optical Accessories	 Oval Lens	 Softening Lens	 Wall Washing Lens	 Honey Comb	 CCT Filter	 UV Filter	 Gradient Filter	 ND Filter
Class 3 Optical Accessories	 Medium Snoot	 Half Snoot	 Full Snoot	 Four Barndoor				

Magic One Series



Light Distribution

Ra97 Typ./4000K



Fix Lens Module

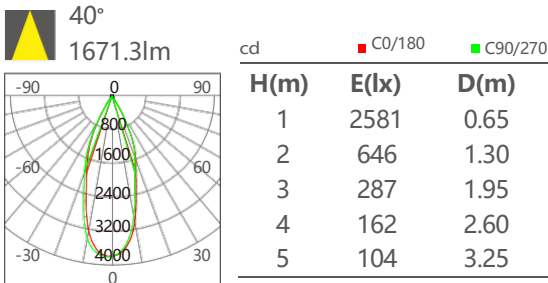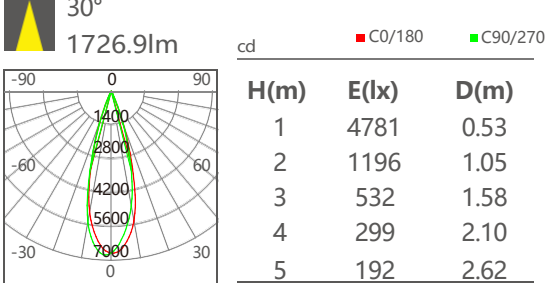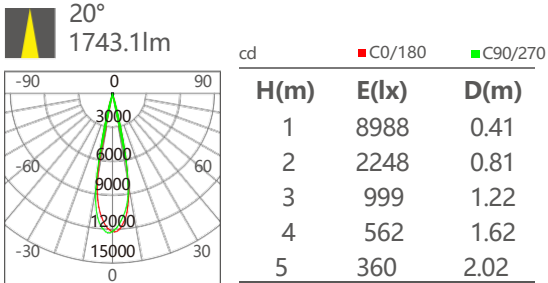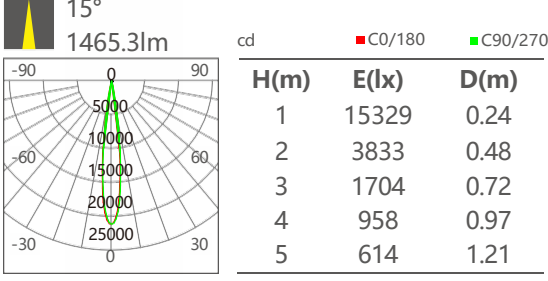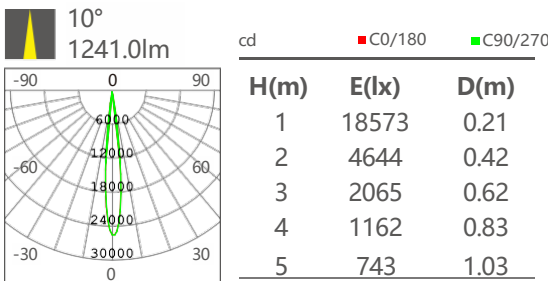

Zoom Lens Module

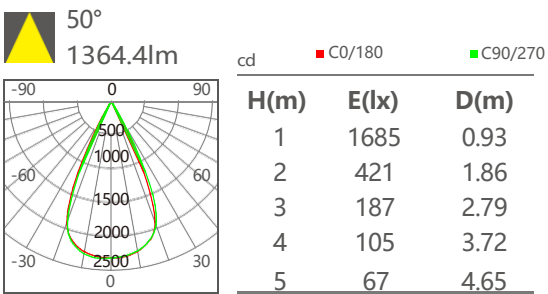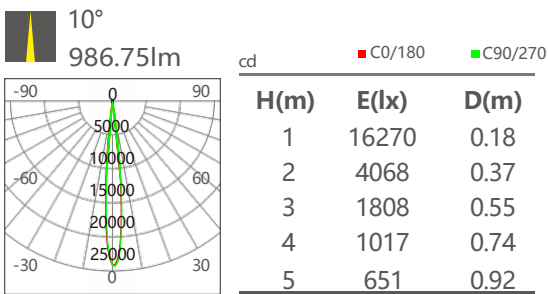

Framing Zoom Lens Module

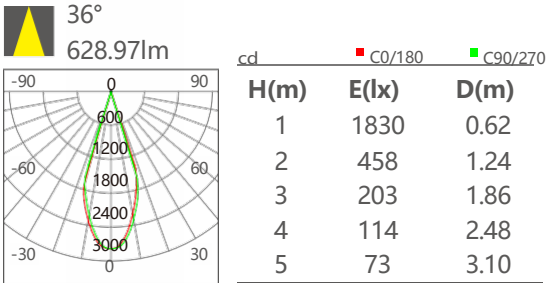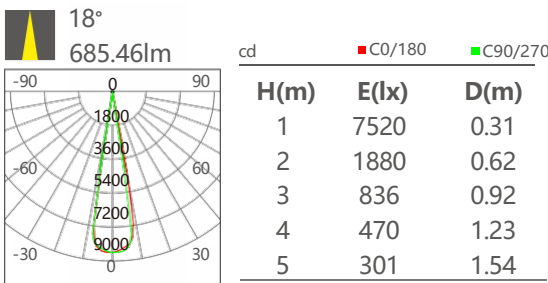

Magic One Series




M7

Color

Color can be customized



Product size UNIT: mm



Product parameters	Model No.	Power	CCT	CRI	Beam Angle
	M7	30W	2700K	ON/OFF Ra97 Typ. CCT ADJUSTABLE Ra90 Typ.	15°
			3000K		20°
			3500K		30°
			4000K		40°
			2700~5700K		10-50° 25-40°

Installation Way



Installation Category

Recessed

Surface Mounted

Track Mounted

Integrated Driver

Input Voltage DC 48V/AC 100-240V 50/60HZ

Control Way Dimming-Onboard/0-10V/DALI/DMX/CASAMBI/ZIGBEE/Bluetooth


Class I Optical Accessories								
	Fix Lens Module	Zoom Lens Module	Framing Zoom Lens Module					
Class 2 Optical Accessories								
	Oval Lens	Softening Lens	Wall Washing Lens	Honey Comb	CCT Filter	UV Filter	Gradient Filter	ND Filter
Class 3 Optical Accessories								
	Medium Snoot	Half Snoot	Full Snoot	Four Barndoor				

Magic One Series


Light Distribution

Ra97 Typ./4000K


Fix Lens Module




H(m)	E(lx)	D(m)
1	18870	0.26
2	4718	0.51
3	2098	0.77
4	1180	1.02
5	755	1.27



H(m)	E(lx)	D(m)
1	14991	0.35
2	3749	0.69
3	1667	1.03
4	937	1.37
5	600	1.71




H(m)	E(lx)	D(m)
1	6438	0.60
2	1610	1.19
3	716	1.78
4	403	2.37
5	258	2.97




H(m)	E(lx)	D(m)
1	4128	0.69
2	1032	1.38
3	459	2.07
4	258	2.75
5	165	3.44

Zoom Lens Module




H(m)	E(lx)	D(m)
1	26330	0.19
2	6583	0.39
3	2926	0.58
4	1646	0.78
5	1053	0.97




H(m)	E(lx)	D(m)
1	3016	0.88
2	754	1.76
3	335	2.64
4	189	3.52
5	121	4.40

Framing Zoom

Lens Module



H(m)	E(lx)	D(m)
1	6205	0.45
2	1551	0.90
3	689	1.36
4	388	1.81
5	248	2.26






H(m)	E(lx)	D(m)
1	2937	0.67
2	734	1.33
3	326	2.00
4	184	2.66
5	118	3.33

VG Zoomable Framing GOBO Light Series


Optics + Structure
Patented Product

⚠ Counterfeiting will
be prosecuted



High-Quality Optical lenses + Precision-Grade Accessories = Professional-Grade Lens

Patented design of mechanical damping
no need to apply any grease
the damping is smooth and stable for long-term use

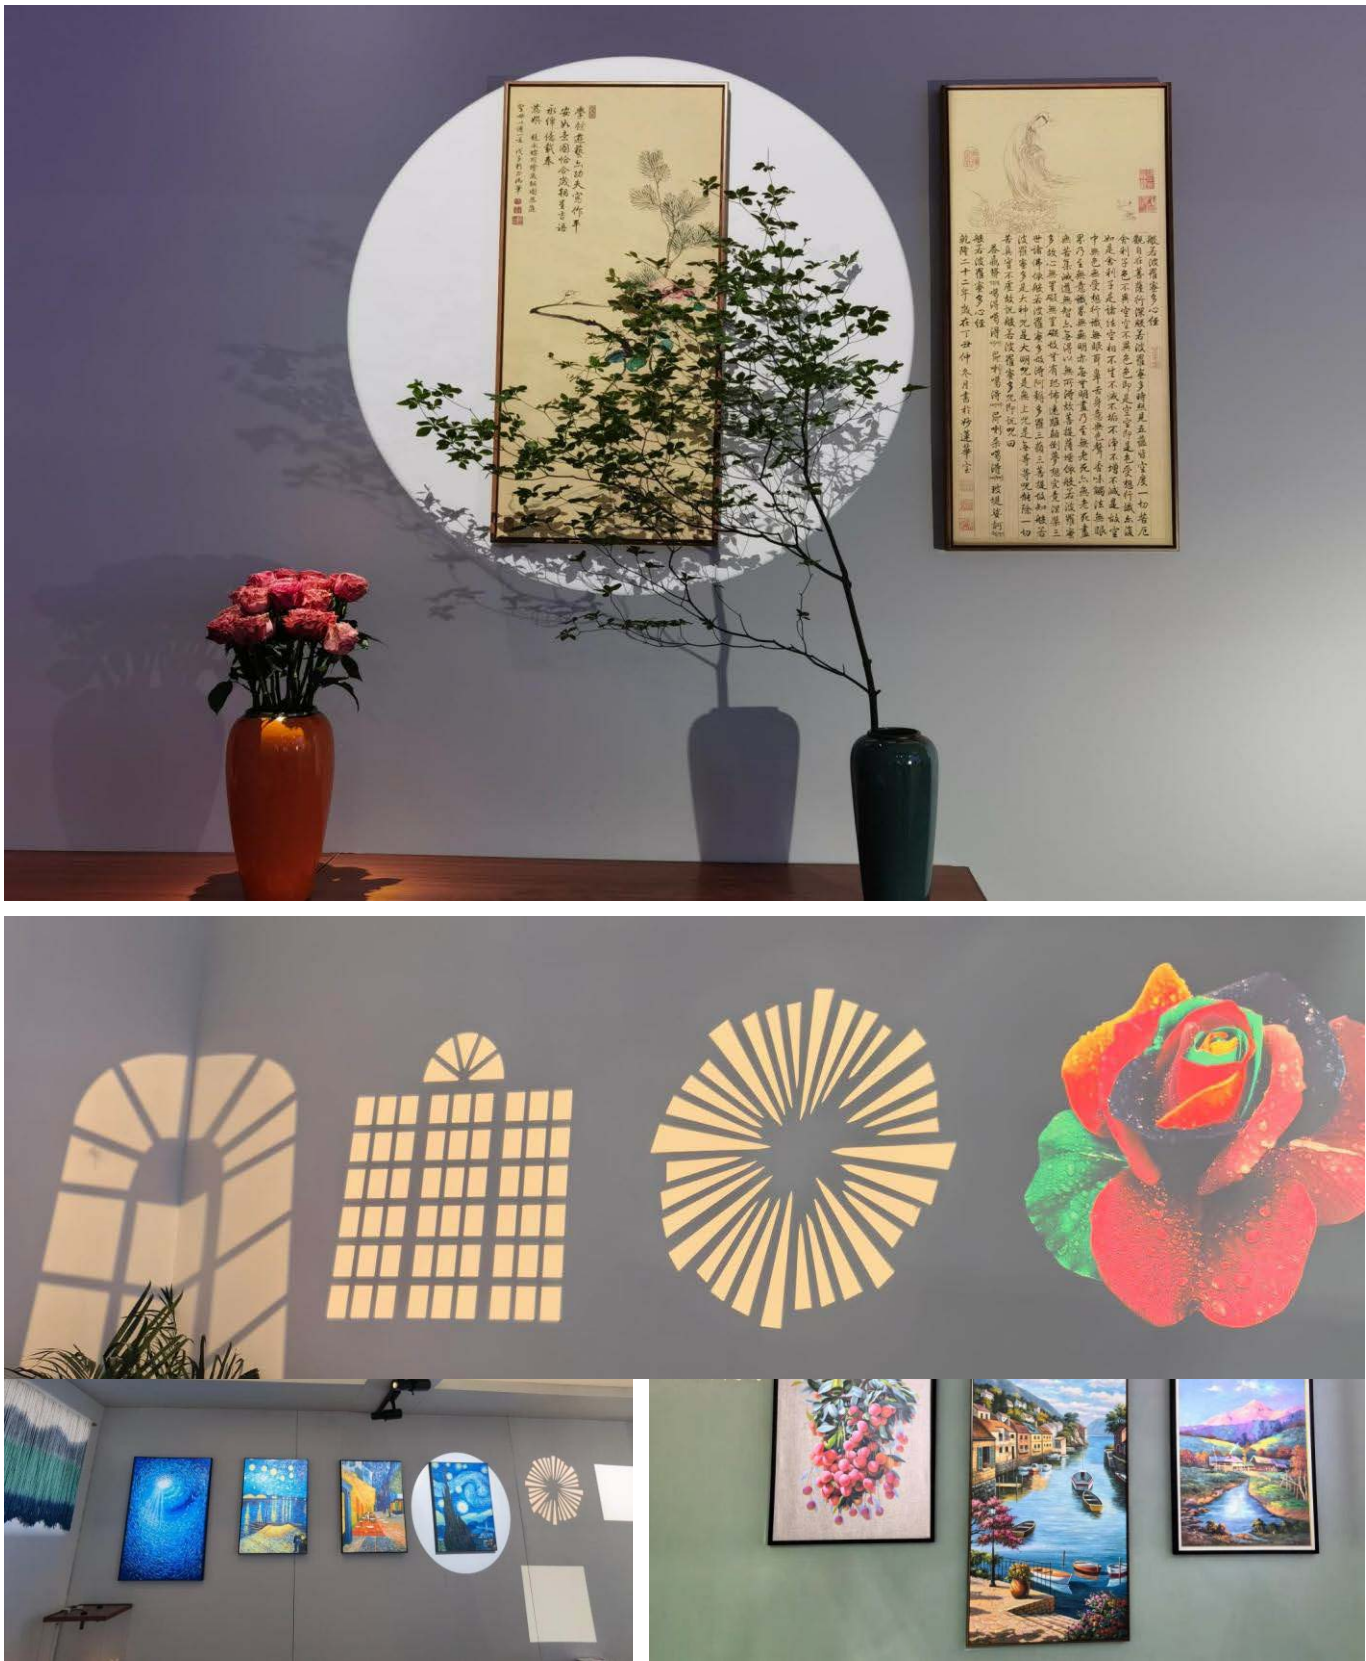


VG Framing GOBO Light Series



VG4510-2035

Color
Color can be customized

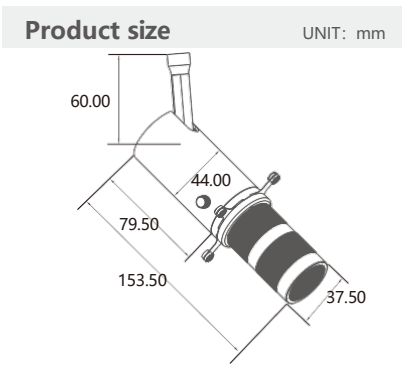

Product parameters	Model No.	Power	CCT	CRI	Beam Angle	Number of lenses	Distortion
	VG4510-2035	10W	2700K 3000K 3500K 4000K 2700~5700K	ON/OFF Ra97 Typ. CCT ADJUSTABLE Ra95 Typ.	20°-35°	7PCS	≤2.0%

Installation Way



Installation Category

Recessed	Surface Mounted	Track Mounted	Magnetic Track
----------	-----------------	---------------	----------------

Input Voltage

DC 48V/AC 100-240V 50/60HZ

Control Way

Dimming-Onboard/0-10V/DALI/DMX/CASAMBI/ZIGBEE/Bluetooth


Accessories

Accessories Display							
---------------------	--	--	--	--	--	--	--

Name	Filter	UV	CCT	Softening	Gradient	ND	Polarizing	Customized
Specifications	37mm	Filter	Filter	Filter	Filter	Filter	Filter	Filter

Name	LOGO PCS	Landscape Physical	Logo	Starry Sky	Marketing	Food
Specifications	Outer Diameter 23mm Content Diameter≤12mm	Projection	Projection	Projection	Projection	Projection


Light Shapes

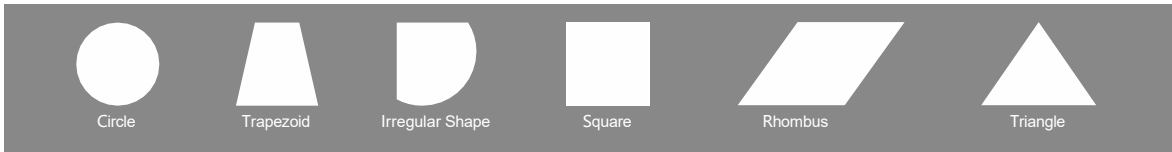



VG Framing GOBO Light Series

Light Distribution


Ra95 Typ./4000K



cd	C0/180	C90/270
H(m)	E(lx)	D(m)
1	2767	0.41
2	692	0.83
3	307	1.24
4	173	1.65
5	111	2.07

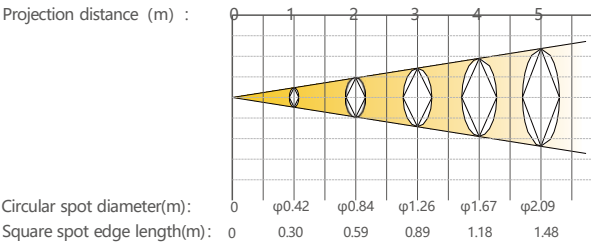

cd	C0/180	C90/270
H(m)	E(lx)	D(m)
1	1356	0.60
2	339	1.19
3	151	1.79
4	85	2.38
5	54	2.98

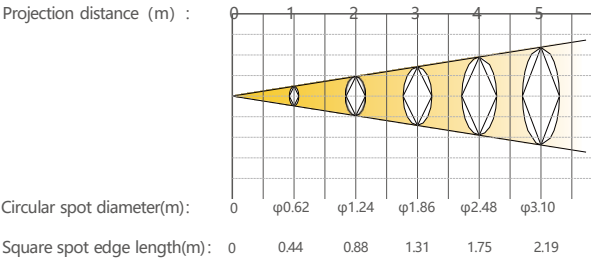


VG Framing GOBO Light Series



VG4510-F10-Spotlight

Color
Color can be customized

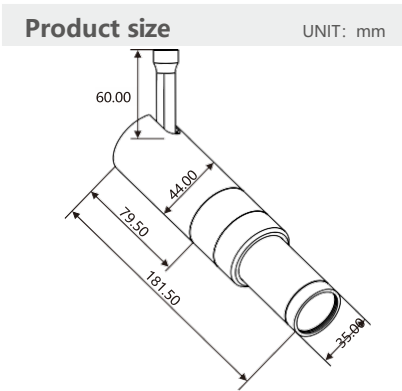

Product parameters

Model No.	Power	CCT	CRI	Beam Angle	Number of lenses
VG4510-F10	10W	2700K	ON/OFF Ra97 Typ. CCT ADJUSTABLE Ra95 Typ.	0°-10°	7PCS
		3000K			
		3500K			
		4000K			
		2700~5700K			

Installation Way





Installation Category

Input Voltage DC 48V/AC 100-240V 50/60HZ


Control Way Dimming-Onboard/0-10V/DALI/DMX/CASAMBI/ZIGBEE/Bluetooth

Accessories

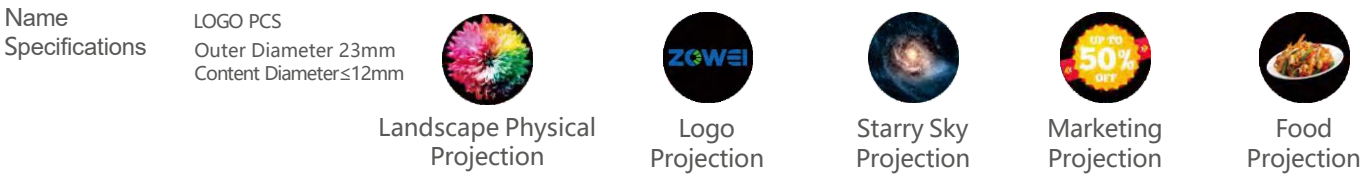
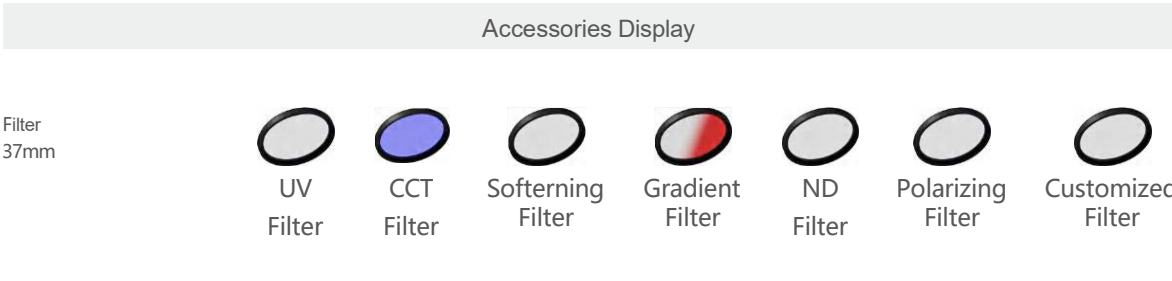


VG Framing GOBO Light Series



Light Distribution
Ra95 Typ./4000K





H(m)	E(lx)	D(m)
1	9368	0.07
2	2342	0.13
3	1041	0.20
4	586	0.26
5	375	0.33

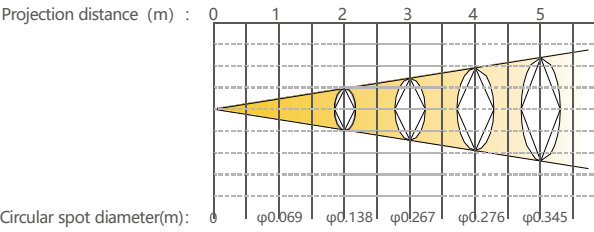


H(m)	E(lx)	D(m)
1	8255	0.11
2	2064	0.22
3	917	0.32
4	516	0.43
5	330	0.54

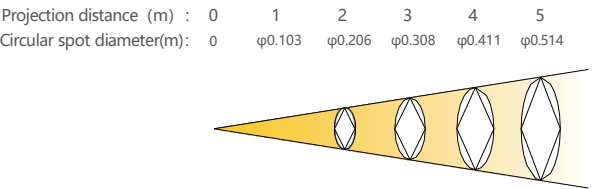

H(m)	E(lx)	D(m)
1	9431	0.14
2	2358	0.28
3	1048	0.42
4	589	0.56
5	377	0.69

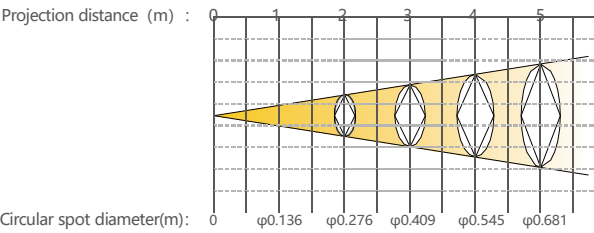

H(m)	E(lx)	D(m)
1	9189	0.17
2	2297	0.33
3	1021	0.50
4	574	0.67
5	367	0.84

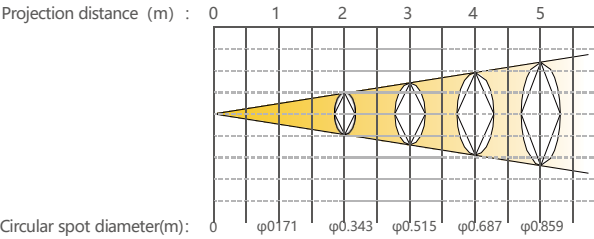

VG Framing GOBO Light Series




VG4510-2035-PLUS

Color
Color can be customized



Product size UNIT: mm



Product parameters

Model No.	Power	CCT	CRI	Beam Angle	Number of lenses	Distortion
VG4510-2035-PLUS	10W	2700K	ON/OFF Ra97 Typ. CCT ADJUSTABLE Ra95 Typ.	20°-35°	8PCS	≤1.2%
		3000K				
		3500K				
		4000K				
		2700~5700K				

Installation Way




Installation Category

Input Voltage DC 48V/AC 100-240V 50/60HZ
Control Way Dimming-Onboard/0-10V/DALI/DMX/CASAMBI/ZIGBEE/Bluetooth

Accessories

Name Specifications	Filter 37mm							
		UV Filter	CCT Filter	Softening Filter	Gradient Filter	ND Filter	Polarizing Filter	Customized Filter
Name Specifications	LOGO PCS Outer Diameter 23mm Content Diameter≤14mm							
		Landscape Physical Projection	Logo Projection	Starry Sky Projection	Marketing Projection	Food Projection		


Light Shapes

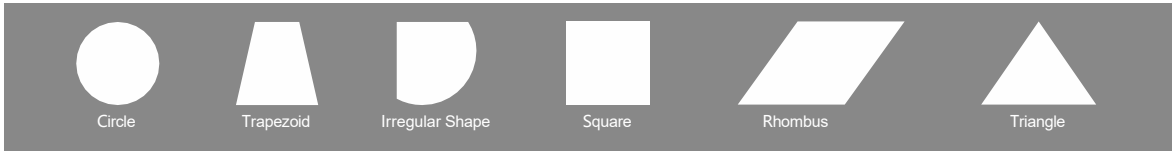



VG Framing GOBO Light Series

Light Distribution


Ra95 Typ./4000K



H(m)	E(lx)	D(m)
1	3125	0.38
2	788	0.76
3	350	1.14
4	197	1.52
5	126	1.90

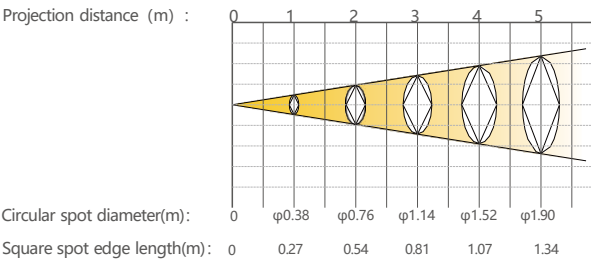

H(m)	E(lx)	D(m)
1	1330	0.60
2	332	1.20
3	148	1.80
4	83	2.40
5	53	3.00

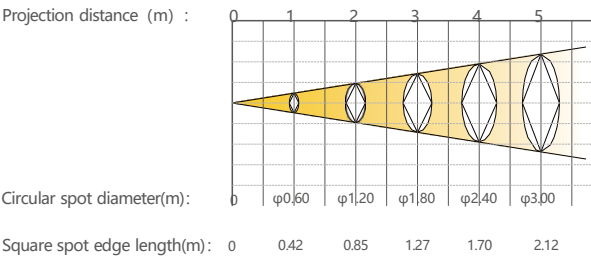

VG Framing GOBO Light Series



VG4510-2035-EG

Color / Color can be customized

Input Voltage


DC 48V/AC 100-240V 50/60HZ

CONTROL WAY

Dimming-Onboard/0-10V/DALI/DMX/
CASAMBI/ZIGBEE/Bluetooth



Product size UNIT: mm



Product parameters


Model No.	Power	CCT	CRI	Beam Angle	Number of lenses	Distortion
VG4510-2035-EG	10W	2700K/3000K/ 3500K/4000K/ 2700~5700K	ON/OFF Ra97 Typ. CCT ADJUSTABLE Ra95 Typ.	20°-35°	7PCS	≤2.0%

Accessories

Accessories Display


Name Specifications	Filter 37mm							
		UV Filter	CCT Filter	Softening Filter	Gradient Filter	ND Filter	Polarizing Filter	Customized Filter
Name Specifications	LOGO PCS Outer Diameter 23mm Content Diameter≤12mm							
		Landscape Physical Projection	Logo Projection	Starry Sky Projection	Marketing Projection	Food Projection		

Light Shapes

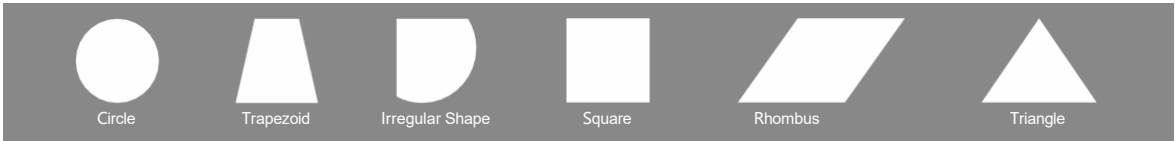

Light Distribution

Ra95 Typ.
4000K

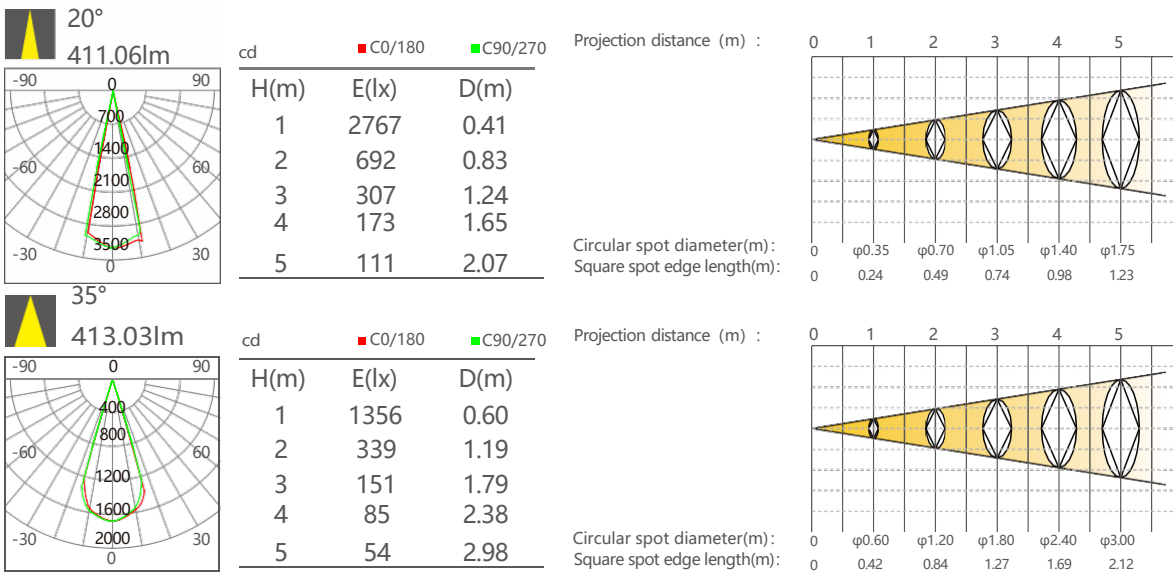

VG Framing GOBO Light Series



VG4510-2035-PLUS-EG

Color / Color can be customized

Input Voltage


DC 48V/AC 100-240V 50/60HZ

CONTROL WAY

Dimming-Onboard/0-10V/DALI/DMX/
CASAMBI/ZIGBEE/Bluetooth



Product size UNIT: mm



Product parameters


Model No.	Power	CCT	CRI	Beam Angle	Number of lenses	Distortion
VG4510-2035-PLUS-EG	10W	2700K/3000K/ 3500K/4000K/ 2700~5700K	ON/OFF Ra97 Typ. CCT ADJUSTABLE Ra95 Typ.	20°-35°	8PCS	≤1.2%

Accessories

Accessories Display


Name Specifications	Filter 37mm							
		UV Filter	CCT Filter	Softening Filter	Gradient Filter	ND Filter	Polarizing Filter	Customized Filter
Name Specifications	LOGO PCS Outer Diameter 23mm Content Diameter≤14mm							
		Landscape Physical Projection	Logo Projection	Starry Sky Projection	Marketing Projection	Food Projection		

Light Shapes

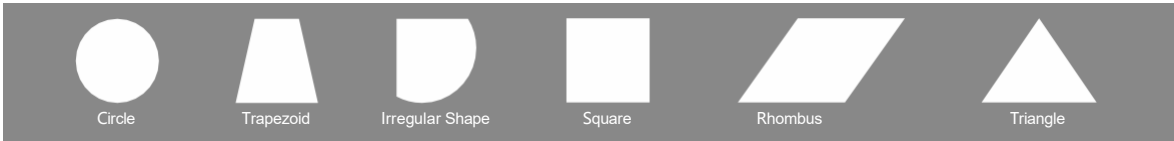

Light Distribution

Ra95 Typ.
4000K

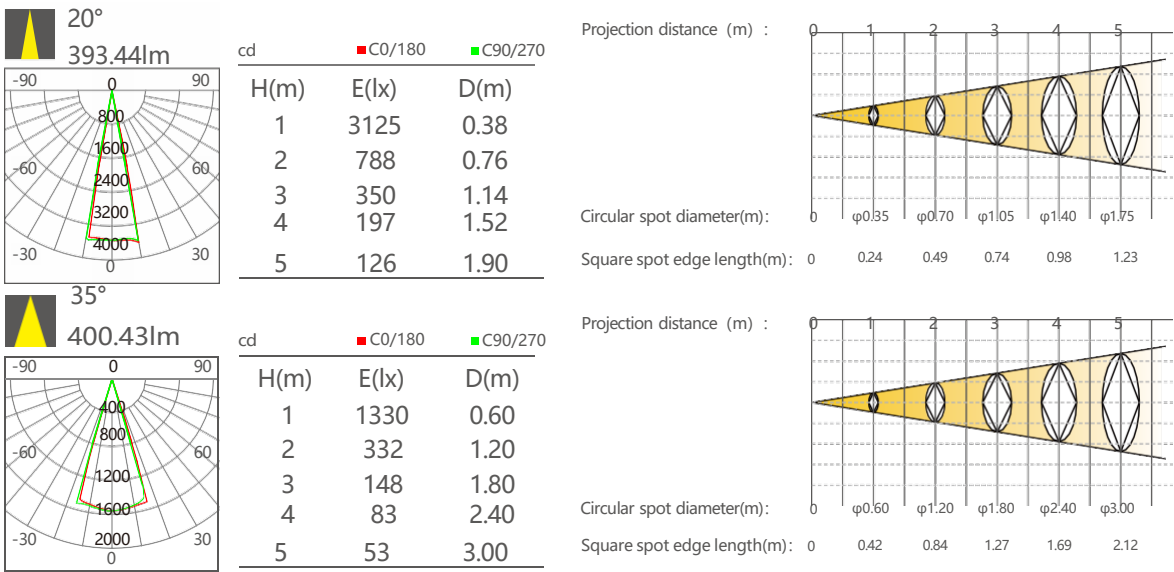

VG Framing GOBO Light Series




VG5515-2035-PLUS

Color
Color can be customized



Product size UNIT: mm



Product parameters	Model No.	Power	CCT	CRI	Beam Angle	Number of lenses	Distortion
	VG5515-2035-PLUS	15W	2700K 3000K 3500K 4000K 2700~5700K	ON/OFF Ra97 Typ. CCT ADJUSTABLE Ra95 Typ.	20°-35°	8PCS	≤1.2%

Installation Way




Installation Category

Input Voltage DC 48V/AC 100-240V 50/60HZ
Control Way Dimming-Onboard/0-10V/DALI/DMX/CASAMBI/ZIGBEE/Bluetooth

Accessories

Name Specifications	Filter 37mm							
		UV Filter	CCT Filter	Softening Filter	Gradient Filter	ND Filter	Polarizing Filter	Customized Filter
Name Specifications	LOGO PCS Outer Diameter 23mm Content Diameter≤14mm							
		Landscape Physical Projection	Logo Projection	Starry Sky Projection	Marketing Projection	Food Projection		


Light Shapes

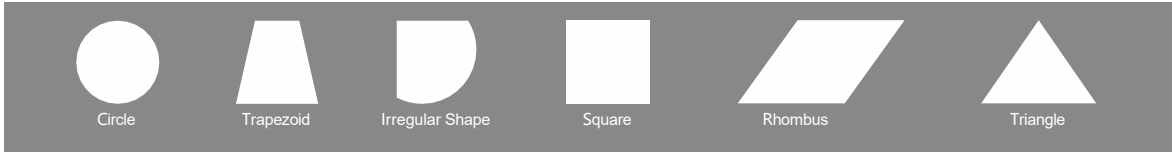



VG Framing GOBO Light Series

Light Distribution


Ra95 Typ./4000K



H(m)	E(lx)	D(m)
1	4089	0.38
2	1022	0.76
3	454	1.14
4	256	1.52
5	164	1.89

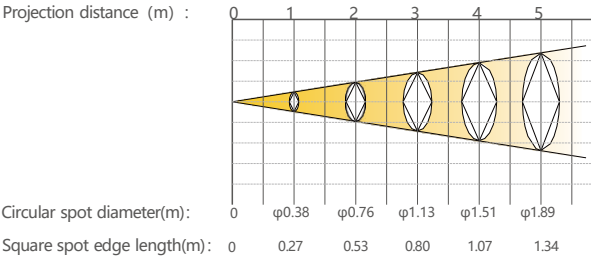

H(m)	E(lx)	D(m)
1	1655	0.60
2	414	1.20
3	184	1.80
4	103	2.40
5	66	3.00

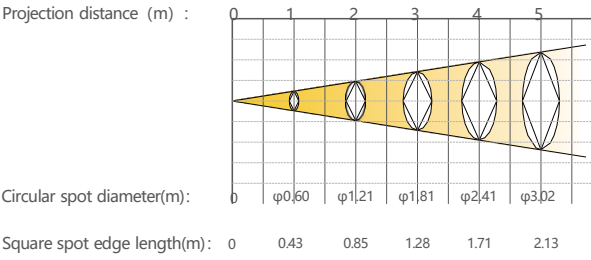


VG Framing GOBO Light Series



VG-MIX20-2035

Color
Color can be customized

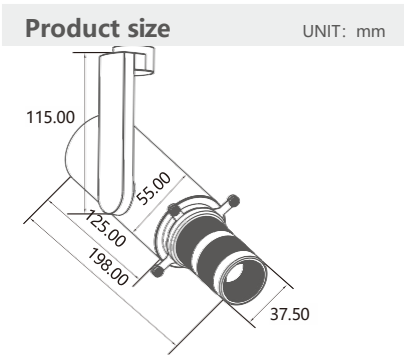


Product parameters	Model No.	Power	CCT	CRI	Beam Angle	Number of lenses	Distortion
	VG-MIX20-2035	20W	2700K 3000K 3500K 4000K 2700~5700K	ON/OFF Ra97 Typ. CCT ADJUSTABLE Ra95 Typ.	20°-35°	7PCS	≤1.2%



Installation Category	Recessed	Surface Mounted	Track Mounted	Magnetic Track
Input Voltage	DC 48V/AC 100-240V 50/60HZ			
Control Way	Dimming-Onboard/0-10V/DALI/DMX/CASAMBI/ZIGBEE/Bluetooth			


Accessories		Accessories Display							
Name Specifications	Filter 37mm								
		UV Filter	CCT Filter	Softening Filter	Gradient Filter	ND Filter	Polarizing Filter	Customized Filter	
Name Specifications	LOGO PCS Outer Diameter 23mm Content Diameter≤12mm								
		Landscape Physical Projection	Logo Projection	Starry Sky Projection	Marketing Projection	Food Projection			

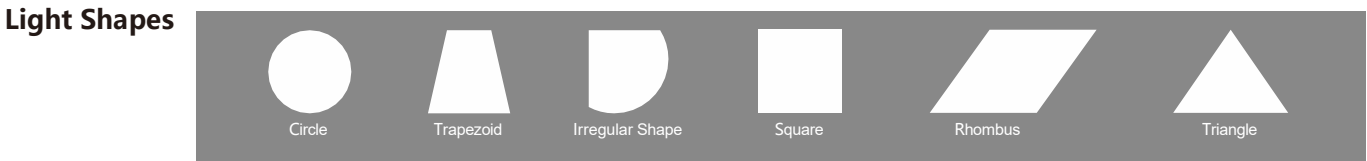



VG Framing GOBO Light Series

Light Distribution


Ra95 Typ./4000K



		cd	C0/180	C90/270
H(m)	E(lx)	D(m)		
1	3630	0.39		
2	908	0.79		
3	403	1.18		
4	227	1.58		
5	145	1.97		

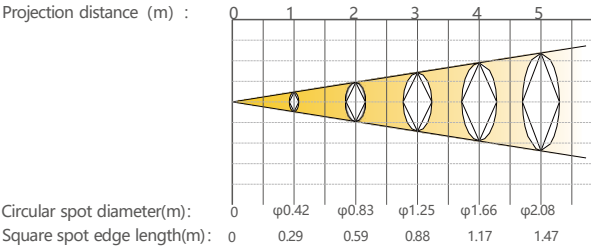

		cd	C0/180	C90/270
H(m)	E(lx)	D(m)		
1	1583	0.59		
2	396	1.18		
3	176	1.77		
4	99	2.35		
5	63	2.94		

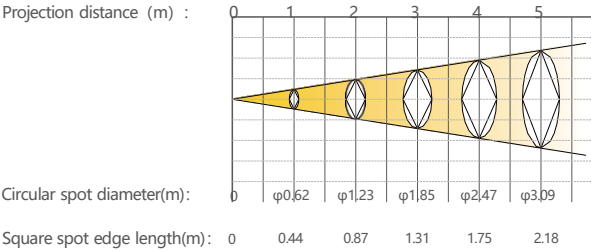


VG Framing GOBO Light Series



VG-MIX20-2035-PLUS

Color
Color can be customized

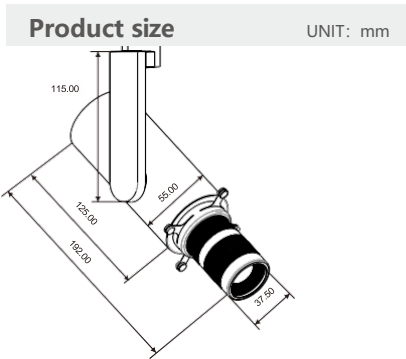


Product parameters	Model No.	Power	CCT	CRI	Beam Angle	Number of lenses	Distortion
	VG-MIX20-2035	20W	2700K 3000K 3500K 4000K 2700~5700K	ON/OFF Ra97 Typ. CCT ADJUSTABLE Ra95 Typ.	20°-35°	8PCS	≤1.2%



Installation Category	Recessed	Surface Mounted	Track Mounted	Magnetic Track
Input Voltage	DC 48V/AC 100-240V 50/60HZ			
Control Way	Dimming-Onboard/0-10V/DALI/DMX/CASAMBI/ZIGBEE/Bluetooth			


Accessories		Accessories Display							
Name Specifications	Filter 37mm								
		UV Filter	CCT Filter	Softening Filter	Gradient Filter	ND Filter	Polarizing Filter	Customized Filter	
Name Specifications	LOGO PCS Outer Diameter 23mm Content Diameter≤12mm								
		Landscape Physical Projection	Logo Projection	Starry Sky Projection	Marketing Projection	Food Projection			

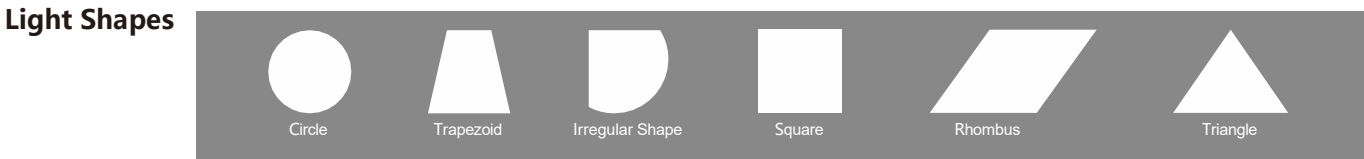



VG Framing GOBO Light Series

Light Distribution


Ra95 Typ./4000K



		cd	C0/180	C90/270
H(m)	E(lx)	D(m)		
1	3630	0.39		
2	908	0.79		
3	403	1.18		
4	227	1.58		
5	145	1.97		

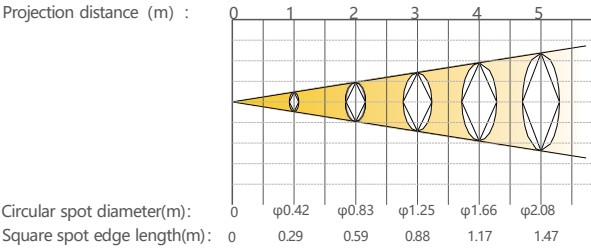

		cd	C0/180	C90/270
H(m)	E(lx)	D(m)		
1	1583	0.59		
2	396	1.18		
3	176	1.77		
4	99	2.35		
5	63	2.94		

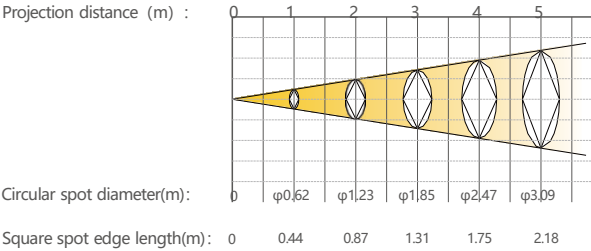


VG Framing GOBO Light Series



VG8530-2540

Color
Color can be customized

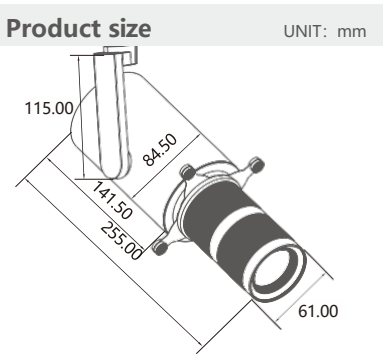

Product parameters	Model No.	Power	CCT	CRI	Beam Angle	Number of lenses	Distortion
	VG8530-2540	30W	2700K 3000K 3500K 4000K 2700~5700K	ON/OFF Ra97 Typ. CCT ADJUSTABLE Ra95 Typ.	25°-40°	8PCS	≤2.0%

Installation Way



Installation Category

Input Voltage
Control Way

Recessed	Surface Mounted	Track Mounted	Side Box
AC220-240V~50/60HZ/AC100-240V~50/60HZ			
Dimming-Onboard/0-10V/DALI/DMX/CASAMBI/ZIGBEE/Bluetooth			

Accessories


Name Specifications

Accessories Display							
Filter 58mm							
	UV Filter	CCT Filter	Softening Filter	Gradient Filter	ND Filter	Polarizing Filter	Customized Filter

Name Specifications

LOGO PCS Outer Diameter 30mm Content Diameter≤15mm					
	Landscape Physical Projection	Logo Projection	Starry Sky Projection	Marketing Projection	Food Projection


Light Shapes

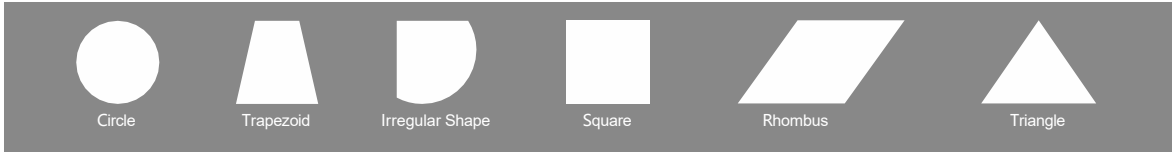



VG Framing GOBO Light Series

Light Distribution


Ra95 Typ./4000K



H(m)	E(lx)	D(m)
1	6484	0.44
2	1621	0.87
3	720	1.31
4	405	1.74
5	259	2.18

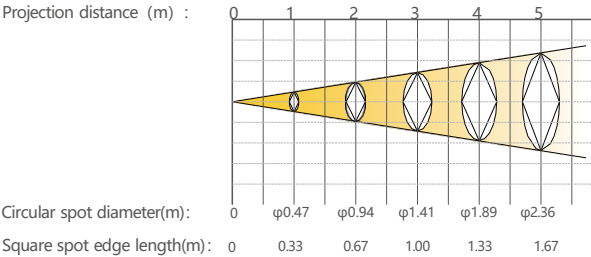

H(m)	E(lx)	D(m)
1	3183	0.64
2	796	1.28
3	354	1.92
4	199	2.56
5	127	3.20

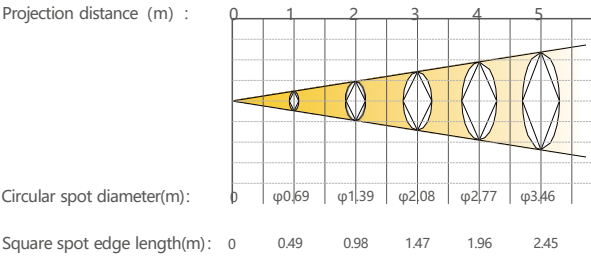


VG Framing GOBO Light Series



VG8530-5060

Color
Color can be customized

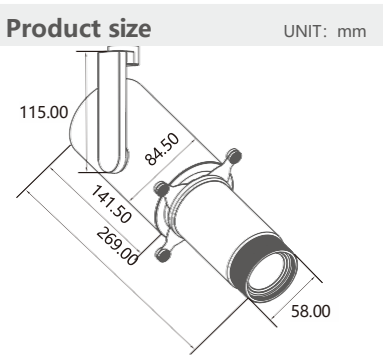

Product parameters	Model No.	Power	CCT	CRI	Beam Angle	Number of lenses	Distortion
	VG8530-5060	30W	2700K 3000K 3500K 4000K 2700~5700K	ON/OFF Ra97 Typ. CCT ADJUSTABLE Ra95 Typ.	50°-60°	14PCS	≤1.0%

Installation Way




Installation Category

Input Voltage AC220-240V~50/60HZ/AC100-240V~50/60HZ
Control Way Dimming-Onboard/0-10V/DALI/DMX/CASAMBI/ZIGBEE/Bluetooth

Accessories

Accessories Display							
Name Specifications	Filter 55mm						
		UV Filter	CCT Filter	Softening Filter	Gradient Filter	ND Filter	Polarizing Filter
Name Specifications	LOGO PCS Outer Diameter 30mm Content Diameter≤20mm						
		Landscape Physical Projection	Logo Projection	Starry Sky Projection	Marketing Projection	Food Projection	


Light Shapes

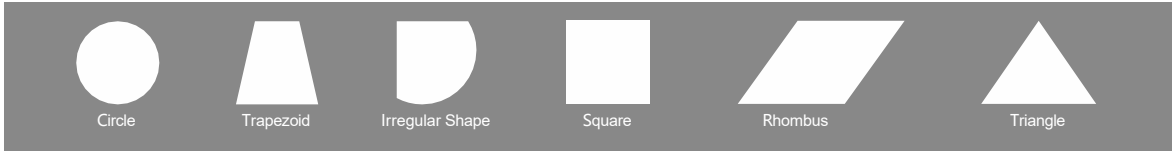



VG Framing GOBO Light Series

Light Distribution


Ra95 Typ./4000K



cd			C0/180	C90/270
H(m)	E(lx)	D(m)		
1	749	0.91		
2	187	1.82		
3	83	2.73		
4	47	3.64		
5	30	4.55		

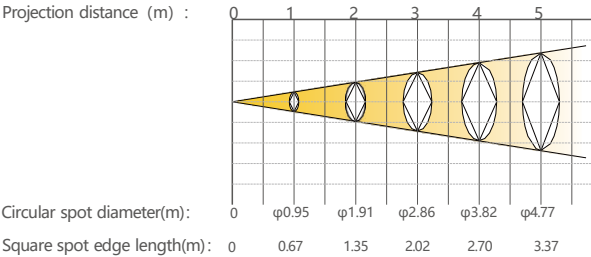

cd			C0/180	C90/270
H(m)	E(lx)	D(m)		
1	605	1.12		
2	151	2.24		
3	67	3.36		
4	38	4.48		
5	24	5.59		

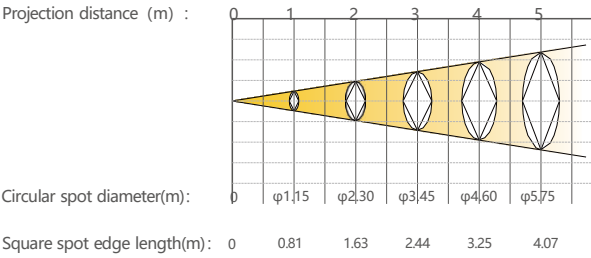

VF Framing GOBO Light Series

Brand All New Optical Design



Zoom series

Zoom angle range 18° - 36°
No distortion,
high-definition projection



Fixed series

Fixed angle 55°
No distortion,
high-definition projection

VF Framing GOBO Light Series




VF2303-1836

Color / Color can be customized

Input Voltage
DC 24V/DC 48V/AC100-240V~50/60HZ

CONTROL WAY
Dimming-Onboard/DALI/CASAMBI

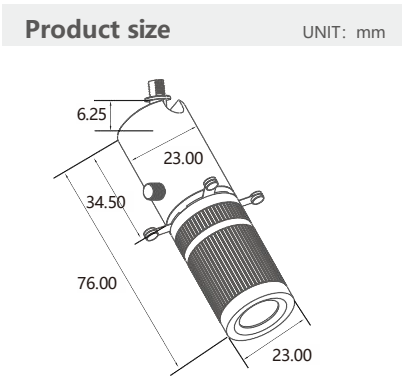

Product parameters	Model No.	Power	CCT	CRI	Beam Angle	Number of lenses	Distortion
	VF2303-1836	3W	2700K 3000K 4000K	ON/OFF Ra97 Typ.	18°-36°	10PCS	≤1.2%

Installation Way



Installation Category

Spring Slice Embedded | Screw Embedded | Surface Mounted | MT10 Track Mounted

Name
Specifications

LOGO PCS
Outer Diameter 10mm
Content Diameter≤6mm



Projection


Projection

Projection

Projection


Projection

Light Shapes


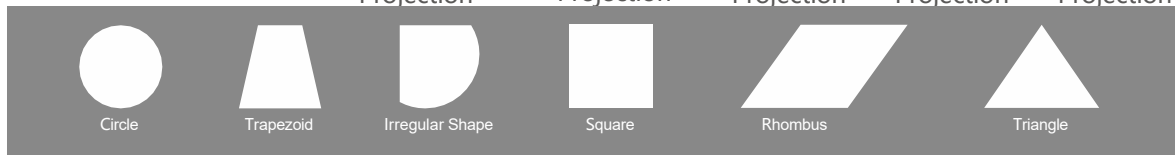


Light Distribution


Ra97 Typ.
4000K



H(m)	E(lx)	D(m)
1	428	0.30
2	107	0.61
3	48	0.91
4	27	1.21
5	17	1.52

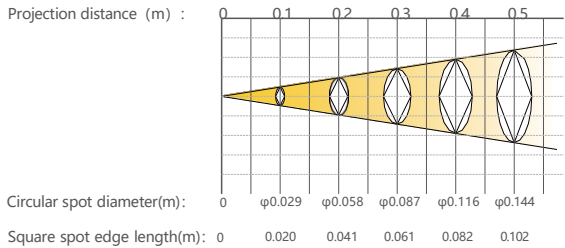

H(m)	E(lx)	D(m)
1	112	0.65
2	28	1.29
3	12	1.94
4	7	2.58
5	4	3.23

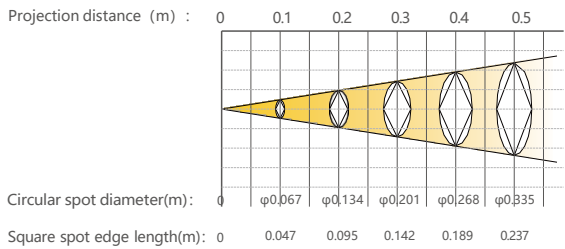

VF Framing GOBO Light Series




VF4510-55

Color / Color can be customized

Input Voltage
DC 48V/AC220-240V~50/60HZ

CONTROL WAY
Dimming-Onboard/0-10V/DALI/DMX/
CASAMBI/ZIGBEE/Bluetooth

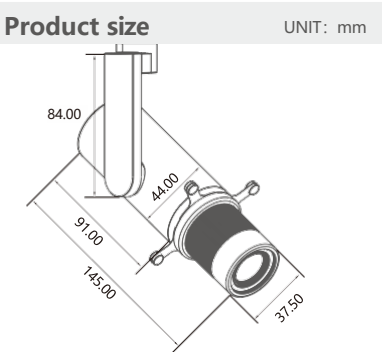

Product parameters	Model No.	Power	CCT	CRI	Beam Angle	Number of lenses	Distortion
	VF4510-55	10W	2700K/3000K/ 3500K/4000K/ 2700~5700K	ON/OFF Ra97 Typ. CCT ADJUSTABLE Ra95 Typ.	55°	10PCS	≤1.0%

Installation Way



Installation Category

Recessed | Surface Mounted | Track Mounted | Magnetic Track

Accessories

Accessories Display

Name
Specifications

Filter
37mm



UV
Filter

CCT
Filter

Softening
Filter

Gradient
Filter

ND
Filter

Polarizing
Filter

Customized
Filter

Name
Specifications

LOGO PCS
Outer Diameter 23mm
Content Diameter≤14mm



Landscape Physical
Projection


Logo
Projection

Starry Sky
Projection

Marketing
Projection


Food
Projection

Light Shapes

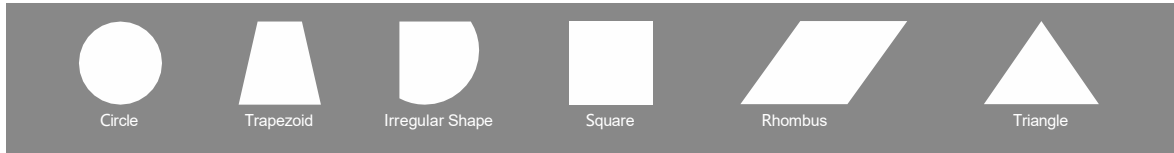


Light Distribution

Ra97 Typ.
4000K



H(m)	E(lx)	D(m)
1	374	1.00
2	93	1.99
3	42	2.99
4	23	3.98
5	15	4.98

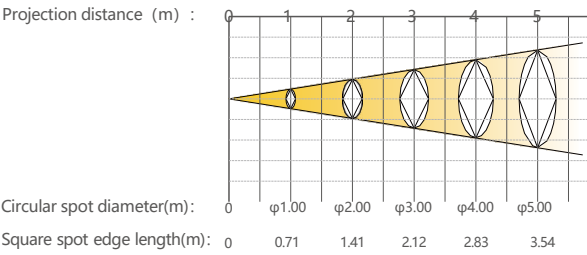


VF Framing GOBO Light Series



VF4510-55-EG

Color
■ □
Color can be customized

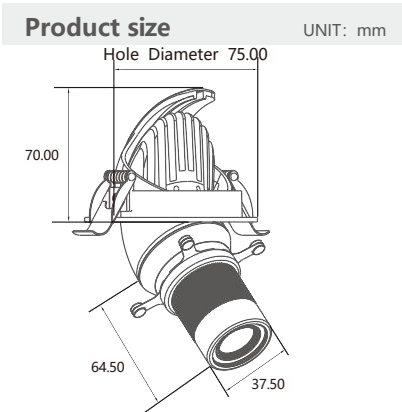

Product parameters	Model No.	Power	CCT	CRI	Beam Angle	Number of lenses	Distortion
	VF4510-55-EG	10W	2700K/3000K/ 3500K/4000K/ 2700~5700K	ON/OFF Ra97 Typ. CCT ADJUSTABLE Ra95 Typ.	55°	10PCS	≤1.0%

Input Voltage DC 48V/AC220-240V~50/60HZ
Control Way Dimming-Onboard/0-10V/DALI/DMX/CASAMBI/ZIGBEE/Bluetooth

Accessories

Accessories Display


Name Specifications Filter 37mm

UV Filter CCT Filter Softening Filter Gradient Filter ND Filter Polarizing Filter Customized Filter


Name Specifications LOGO PCS Outer Diameter 23mm Content Diameter≤14mm

Landscape Physical Projection Logo Projection Starry Sky Projection Marketing Projection Food Projection

Light Shapes

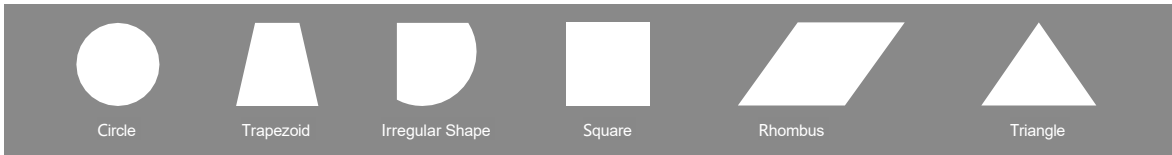

Light Distribution

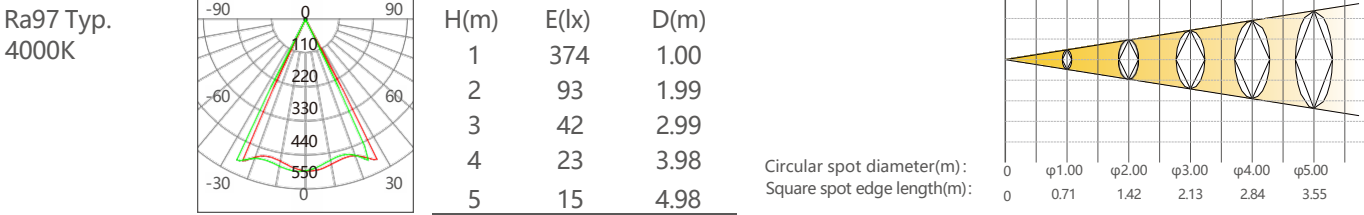

VF Framing GOBO Light Series




VF5515-55

Color / Color can be customized

Input Voltage DC 48V/AC220-240V~50/60HZ

CONTROL WAY Dimming-Onboard/0-10V/DALI/DMX/CASAMBI/ZIGBEE/Bluetooth

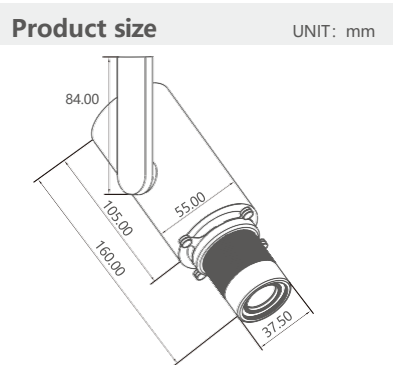

Product parameters	Model No.	Power	CCT	CRI	Beam Angle	Number of lenses	Distortion
	VF5515-55	15W	2700K/3000K/ 3500K/4000K/ 2700~5700K	ON/OFF Ra97 Typ. CCT ADJUSTABLE Ra95 Typ.	55°	10PCS	≤1.0%

Installation Way

Installation Category



Accessories

Accessories Display


Name Specifications Filter 37mm

UV Filter CCT Filter Softening Filter Gradient Filter ND Filter Polarizing Filter Customized Filter


Name Specifications LOGO PCS Outer Diameter 23mm Content Diameter≤14mm

Landscape Physical Projection Logo Projection Starry Sky Projection Marketing Projection Food Projection

Light Shapes

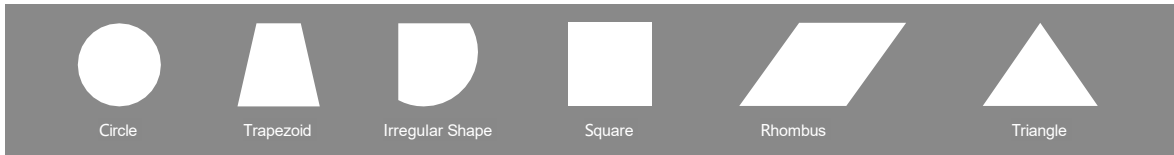

Light Distribution

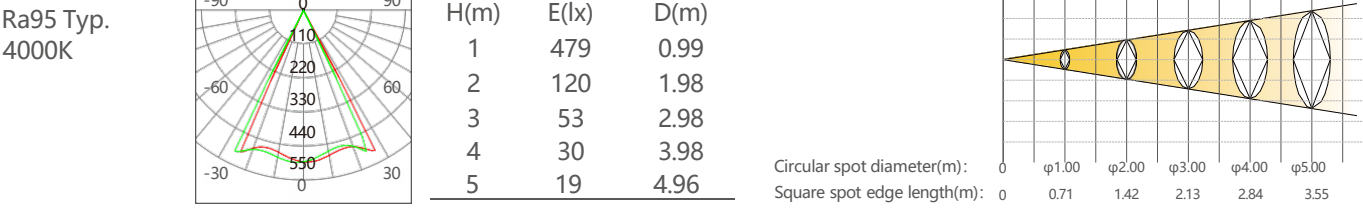

VF Framing GOBO Light Series



VF6520-1836

Color
Color can be customized



Product parameters	Model No.	Power	CCT	CRI	Beam Angle	Number of lenses	Distortion
	VF6520-1836	20W	2700K 3000K 3500K 4000K 2700~5700K	ON/OFF Ra97 Typ. CCT ADJUSTABLE Ra95 Typ.	18°-36°	12PCS	≤1.5%

Installation Way

Installation Category

Recessed | Surface Mounted | Track Mounted | Magnetic Track

Input Voltage

DC 48V/AC 100-240V 50/60HZ

Control Way

Dimming-Onboard/0-10V/DALI/DMX/CASAMBI/ZIGBEE/Bluetooth

Accessories

Accessories Display

Name Specifications

Filter 49mm

UV Filter

CCT Filter

Softening Filter

Gradient Filter

ND Filter

Polarizing Filter

Customized Filter

Name Specifications

LOGO PCS
Outer Diameter 23mm
Content Diameter≤18mm

Landscape Physical Projection

Logo Projection

Starry Sky Projection

Marketing Projection


Food Projection

Light Shapes



VF Framing GOBO Light Series

Light Distribution


Ra97 Typ./4000K



cd	C0/180	C90/270
H(m)	E(lx)	D(m)
1	7520	0.31
2	1880	0.62
3	836	0.92
4	470	1.23
5	301	1.54

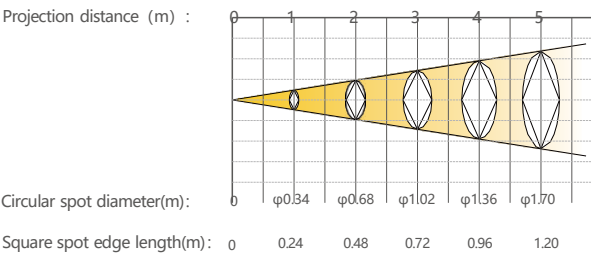

cd	C0/180	C90/270
H(m)	E(lx)	D(m)
1	1830	0.62
2	458	1.24
3	203	1.86
4	114	2.48
5	73	3.10

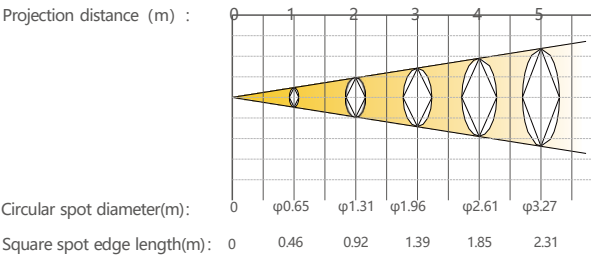

VF Framing GOBO Light Series




VF8530-1836

Color
Color can be customized



Product size UNIT: mm



Product parameters	Model No.	Power	CCT	CRI	Beam Angle	Number of lenses	Distortion
	VF8530-1836	30W	2700K 3000K 3500K 4000K 2700~5700K	ON/OFF Ra97 Typ. CCT ADJUSTABLE Ra95 Typ.	18°-36°	9PCS	≤1.2%

Installation Way



Installation Category

Recessed	Surface Mounted	Track Mounted	Magnetic Track
----------	-----------------	---------------	----------------

Input Voltage

DC 48V/AC 100-240V 50/60HZ

Control Way


Dimming-Onboard/0-10V/DALI/DMX/CASAMBI/ZIGBEE/Bluetooth

Accessories

Accessories Display

Name Specifications	Filter 55mm	UV Filter	CCT Filter	Softening Filter	Gradient Filter	ND Filter	Polarizing Filter	Customized Filter
Name Specifications	LOGO PCS Outer Diameter 25mm Content Diameter≤20mm	Landscape Physical Projection	Logo Projection	Starry Sky Projection	Marketing Projection	Food Projection		


Light Shapes

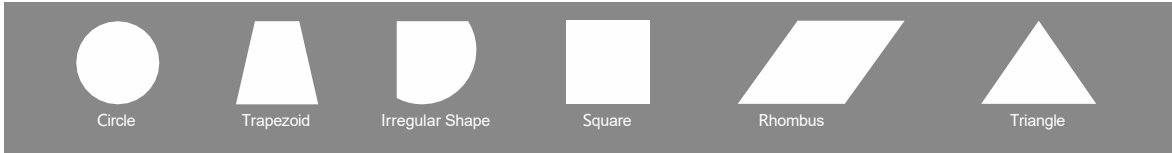



VF Framing GOBO Light Series

Light Distribution


Ra97 Typ./4000K



cd	C0/180	C90/270
H(m)	E(lx)	D(m)
1	10541	0.34
2	2635	0.67
3	1171	1.01
4	659	1.35
5	422	1.68

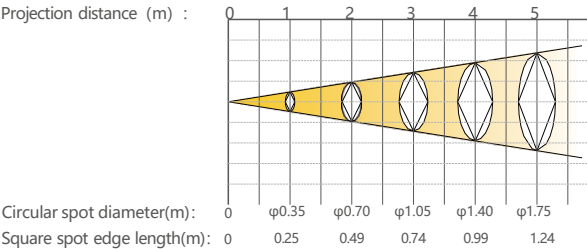

cd	C0/180	C90/270
H(m)	E(lx)	D(m)
1	3449	0.64
2	862	1.28
3	383	1.92
4	216	2.55
5	138	3.19

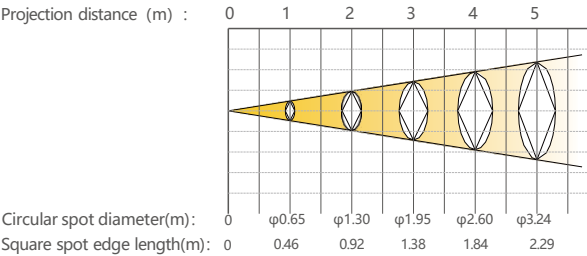

ANYSPOT






ANYSPOT SERIES

| **CASAMBI**

325°
-pan-

260°
-Tilt-

10°-50°
-Zoom-

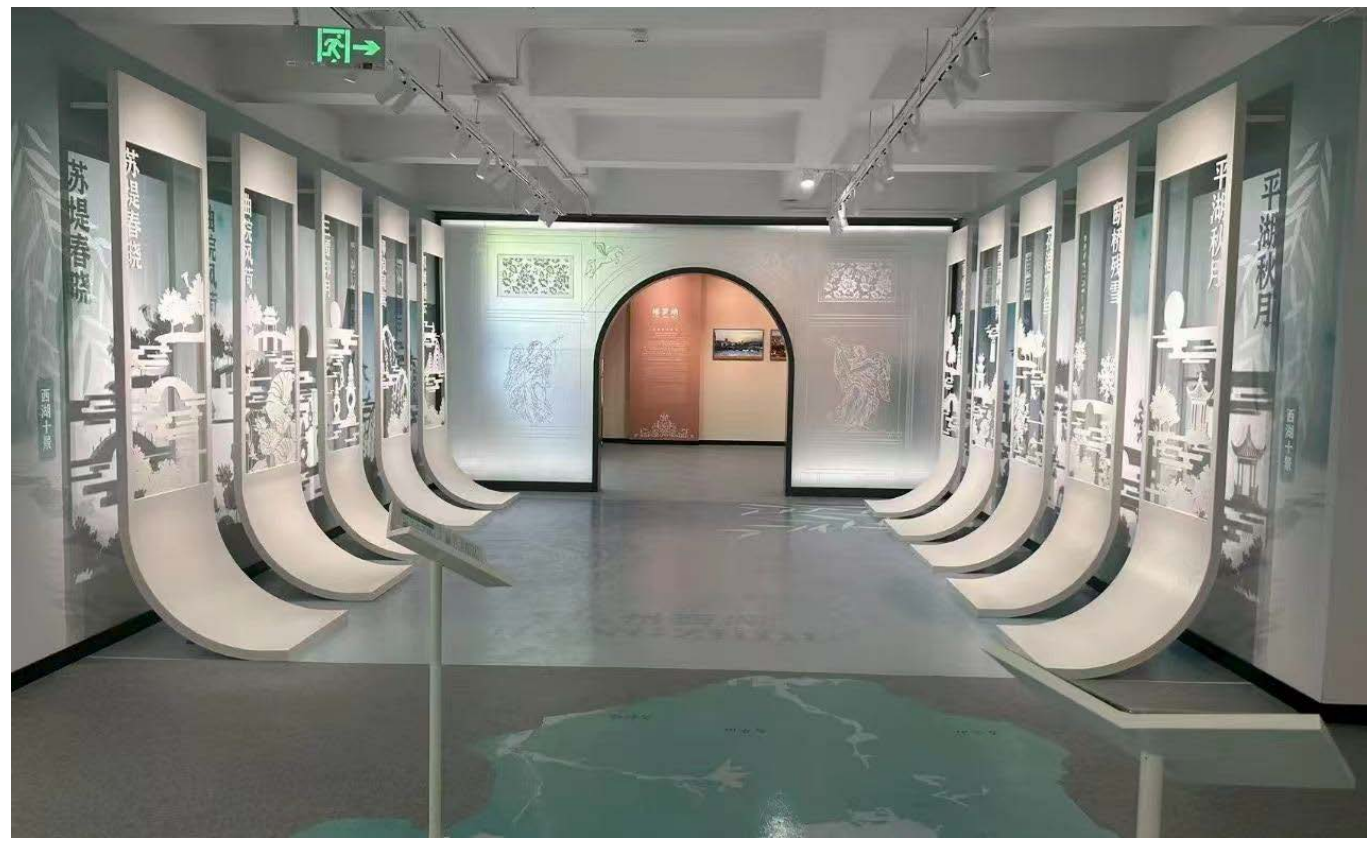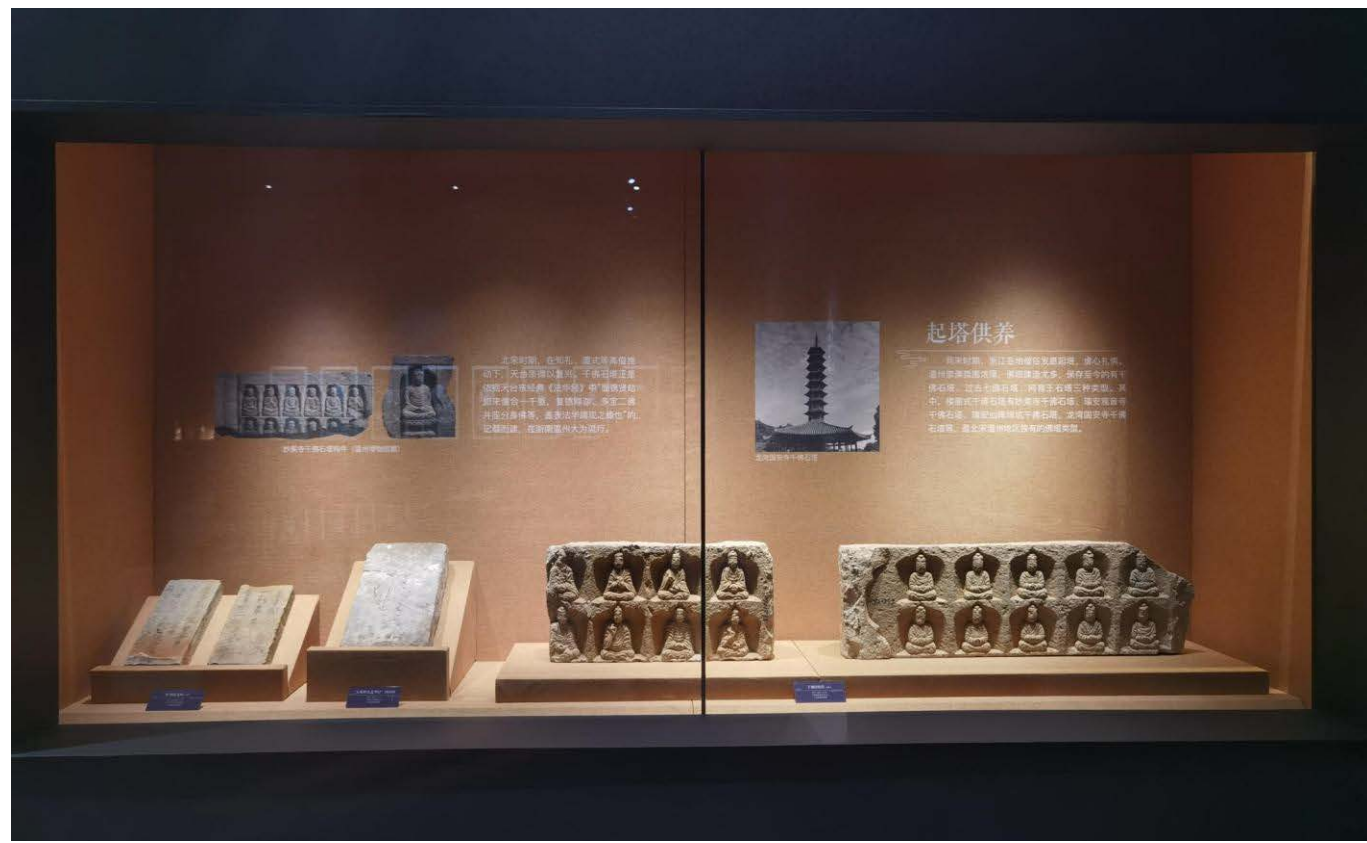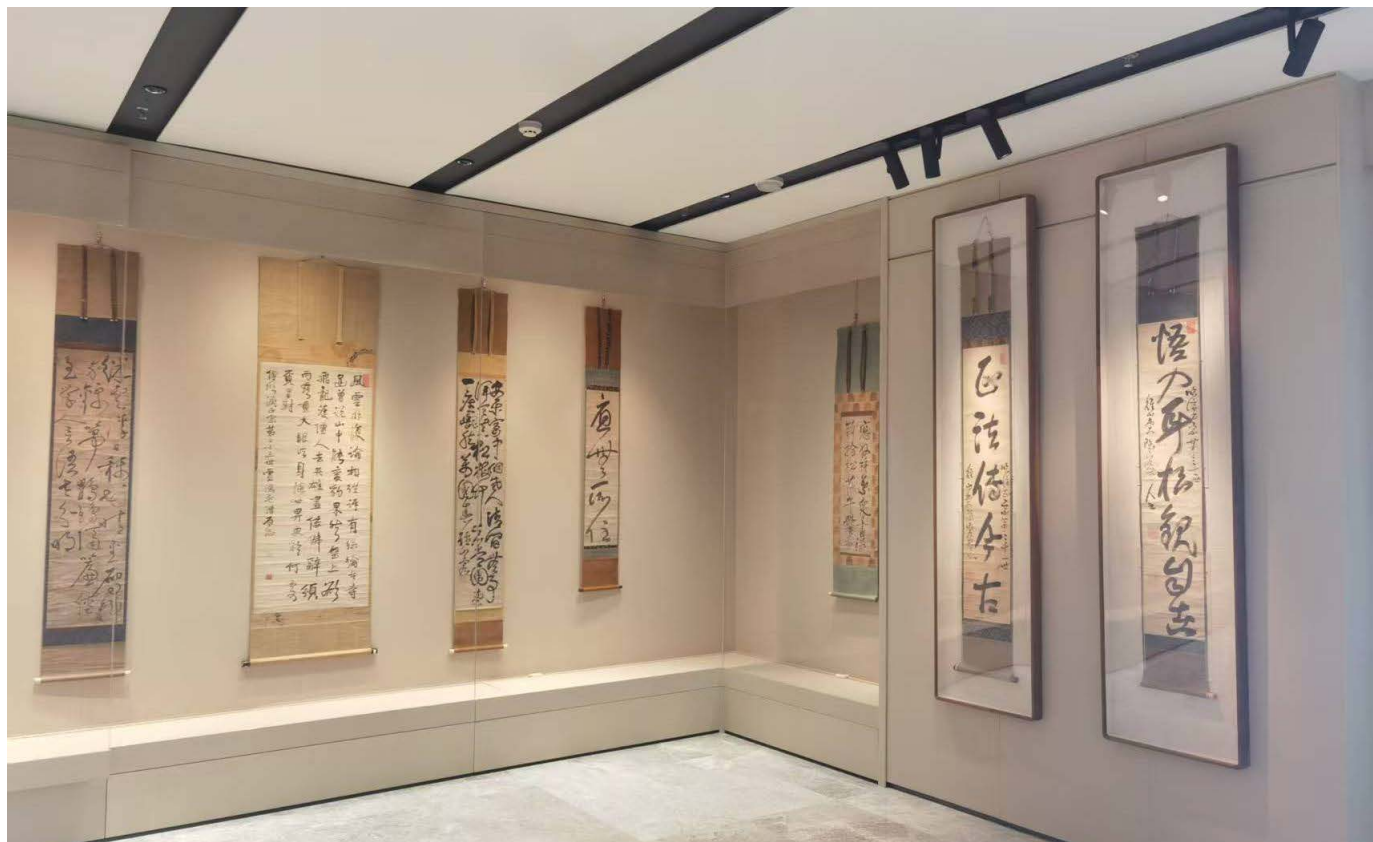

AnySpot Series



A5

Color

Color can be customized

Product size 单位: mm



Product parameters	Model No.	Power	CCT	CRI	Beam Angle
	A5	20W	2700K 3000K 3500K 4000K 2700~6500K	ON/OFF Ra97 Typ. CCT ADJUSTABLE Ra95 Typ.	10°-50°

Installation Way



Installation Category	Recessed	Surface Mounted	Integrated Driver
-----------------------	----------	-----------------	-------------------

Input Voltage DC 48V/AC 220-240V 50/60HZ


Control Way CASAMBI

Class 2 Optical Accessories	 Oval Lens	 Softening Lens	 Wall Lens	 Washing Lens	 Honey Comb	 CCT Filter	 UV FILTER	 Gradient Filter	 ND Filter
Class 3 Optical Accessories	 Medium Snoot	 Half Snoot	 Full Snoot	 Cross Baffle	 Four Barndoor				

AnySpot Series

Light Distribution

Ra97 Typ./4000K

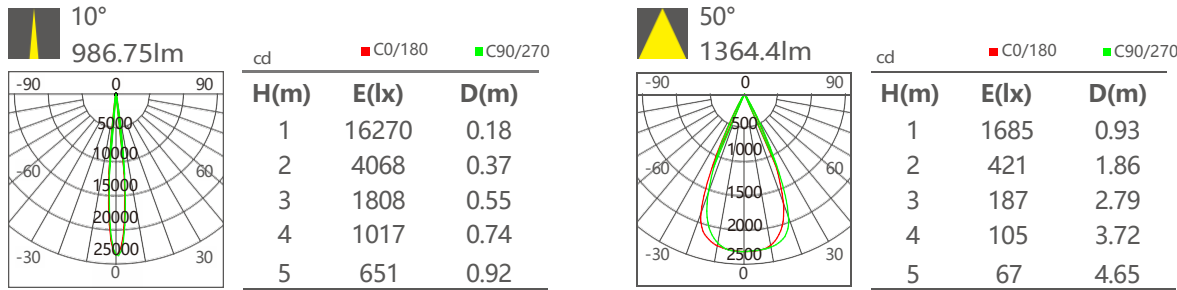

AnySpot Series



A7
Color
Color can be customized



Product parameters	Model No.	Power	CCT	CRI	Beam Angle
	A7	30W	2700K 3000K 3500K 4000K 2700~6500K	ON/OFF Ra97 Typ. CCT ADJUSTABLE Ra95 Typ.	10°-50°

Installation Way



Installation Category	Recessed	Surface Mounted	Integrated Driver
-----------------------	----------	-----------------	-------------------

Input Voltage DC 48V/AC 220-240V 50/60HZ


Control Way CASAMBI

Class 2 Optical Accessories	Oval Lens	Softening Lens	Wall Lens	Washing Lens	Honey Comb	CCT Filter	UV FILTER	Gradient Filter	ND Filter
Class 3 Optical Accessories	Medium Snoot	Half Snoot	Full Snoot	Cross Baffle	Four Barndoor				


AnySpot Series

Light Distribution

Ra97 Typ./4000K



cd			C0/180	C90/270
H(m)	E(lx)	D(m)		
1	26330	0.19		
2	6583	0.39		
3	2926	0.58		
4	1646	0.78		
5	1053	0.97		



cd			C0/180	C90/270
H(m)	E(lx)	D(m)		
1	3016	0.88		
2	754	1.76		
3	335	2.64		
4	189	3.52		
5	121	4.40		

AnySpot Series



A9

Color

Color can be customized

Product size 单位: mm





Product parameters	Model No.	Power	CCT	CRI	Beam Angle
	A9	40W	2700K 3000K 3500K 4000K 2700~6000K	ON/OFF Ra97 Typ. CCT ADJUSTABLE Ra90 Typ.	10°-50° 15°-50°

Installation Way



Installation Category	Recessed	Surface Mounted	Integrated Driver
-----------------------	----------	-----------------	-------------------

Input Voltage DC 48V/AC 220-240V 50/60HZ



Control Way CASAMBI

Class 2 Optical Accessories	 Oval Lens	 Softening Lens	 Wall Lens	 Washing Lens	 Honey Comb	 CCT Filter	 UV FILTER	 Gradient Filter	 ND Filter
Class 3 Optical Accessories	 Medium Snoot	 Half Snoot	 Full Snoot	 Cross Baffle	 Four Barndoor				

AnySpot Series

Light Distribution

Ra97 Typ./4000K

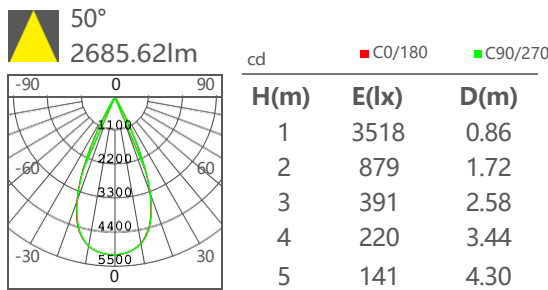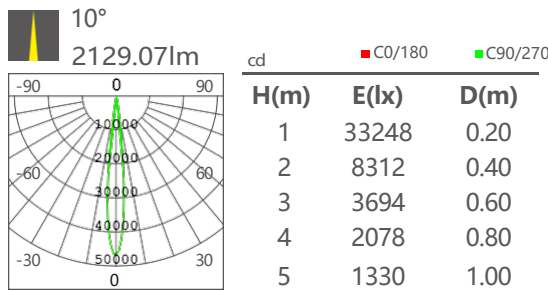


ELITE

Unlimited Lighting Creator




The same light source body can be matched with different optical components such as fixed lens, zoom lens, and framing. At the same time, various optical accessories can be arbitrarily superimposed to achieve flexible, diverse, and easy personalized combinations, fully meeting the lighting needs of different customers for various scenarios. In particular, it can meet the small-batch and diverse customization needs of customers.

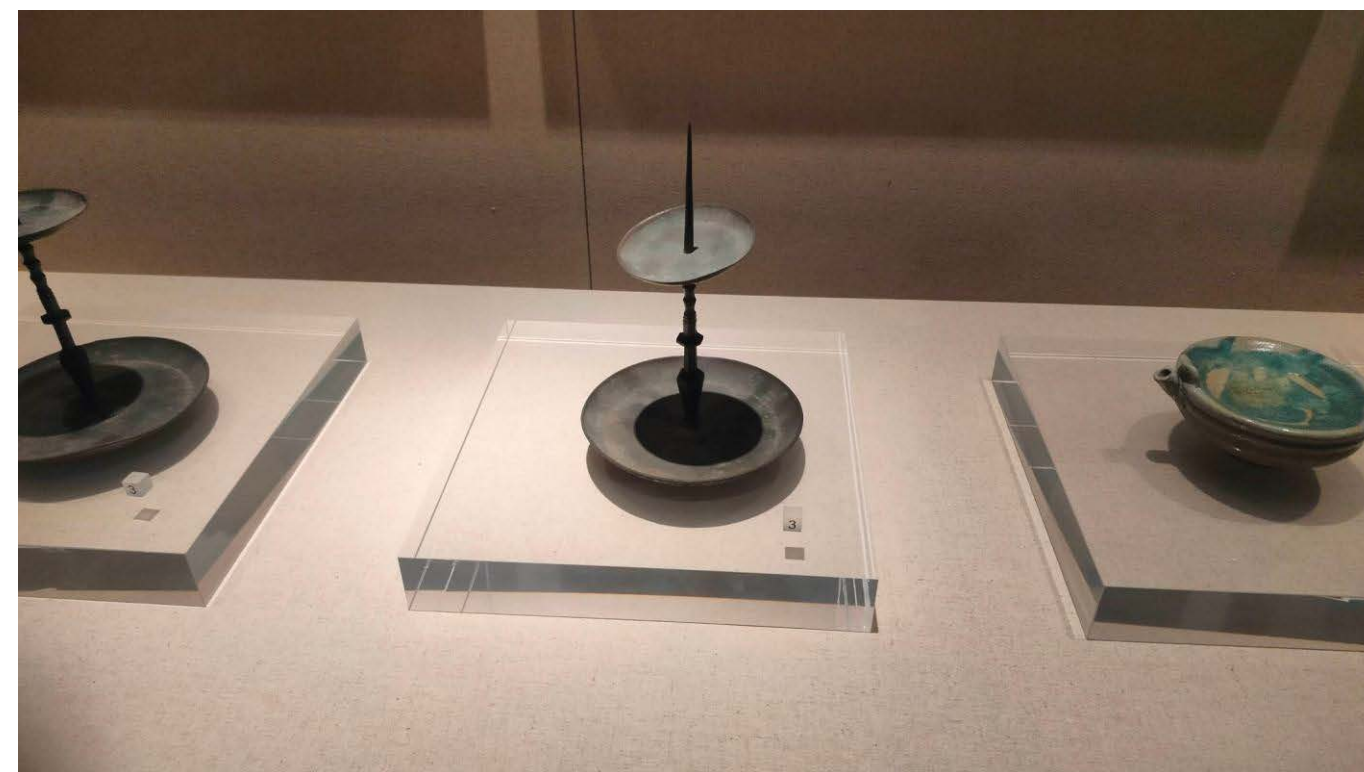

Elite Track Series



E3
Color
Color can be customized

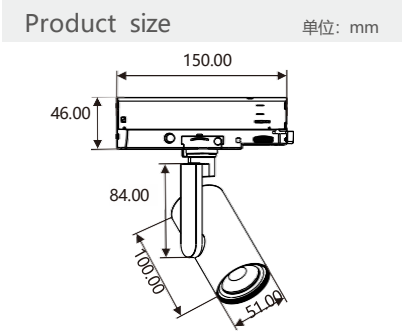

Product parameters	Model No.	Power	CCT	CRI	Beam Angle
	E3	12W	2700K	ON/OFF Ra95 Typ. CCT ADJUSTABLE Ra90 Typ.	10°
			3000K		15°
			3500K		24°
			4000K		36°
			2700~5700K		50°

Installation Way




Installation Category	Recessed	Surface Mounted	Magnetic Track	Track Mounted	Integrated Driver
-----------------------	----------	-----------------	----------------	---------------	-------------------

Input Voltage DC 48V/AC 100-240V 50/60HZ
Control Way Dimming-Onboard/0-10V/DALI/DMX/CASAMBI/ZIGBEE/Bluetooth

Class 2 Optical Accessories									
	Oval Lens	Softening Lens	Wall Lens	Washing Lens	Honey Comb	CCT Filter	UV FILTER	Gradient Filter	ND Filter
Class 3 Optical Accessories									
	Medium Snoot	Half Snoot	Full Snoot	Four Barndoor					

Elite Track Series


Light Distribution
Ra95 Typ./4000K

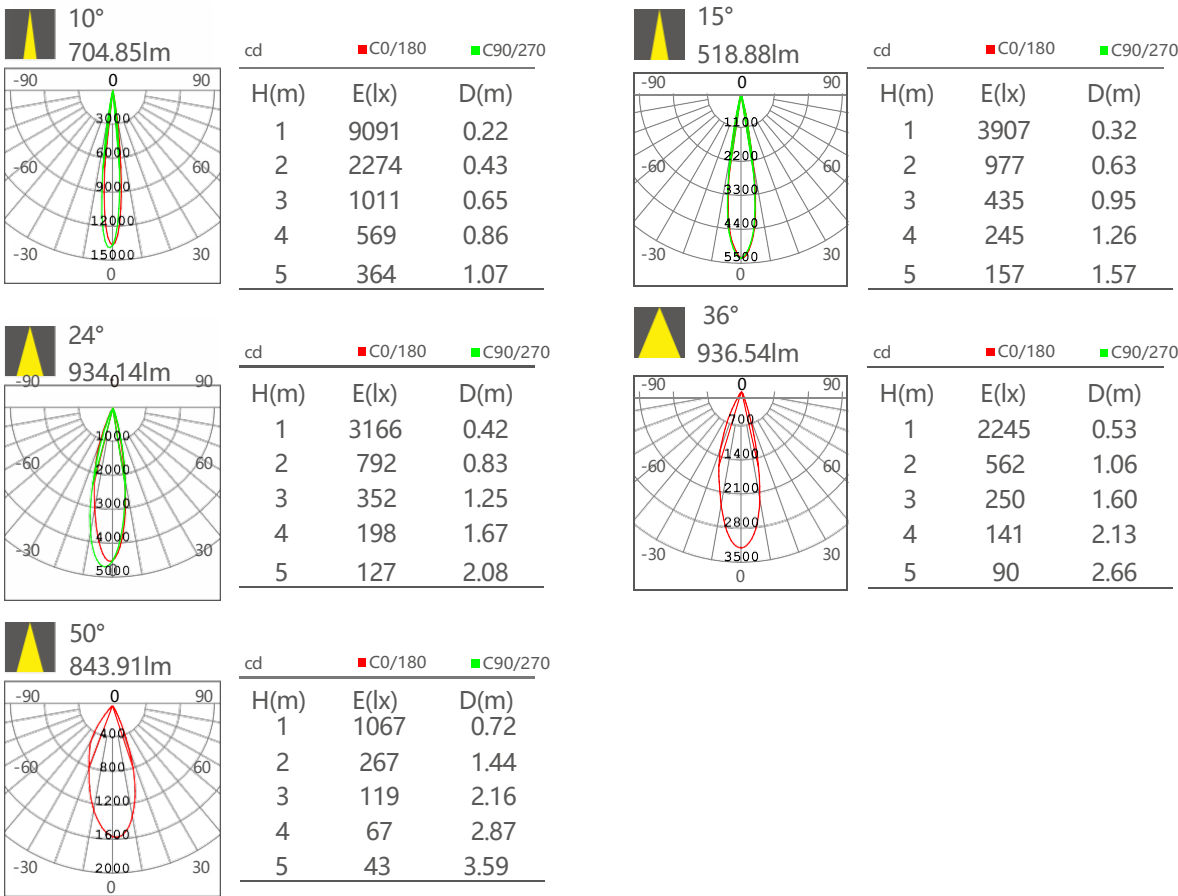

Elite Track Series



E5
Color
Color can be customized

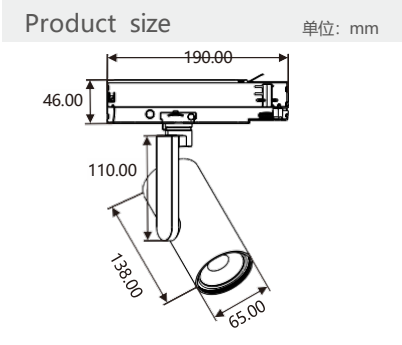

Product parameters	Model No.	Power	CCT	CRI	Beam Angle
	E5	20W	2700K 3000K 3500K 4000K 2700~5700K	ON/OFF Ra95 Typ. CCT ADJUSTABLE Ra95 Typ.	10° 15° 24° 36° 50°

Installation Way




Installation Category	Recessed	Surface Mounted	Magnetic Track	Track Mounted	Integrated Driver
-----------------------	----------	-----------------	----------------	---------------	-------------------

Input Voltage DC 48V/AC 100-240V 50/60HZ
Control Way Dimming-Onboard/0-10V/DALI/DMX/CASAMBI/ZIGBEE/Bluetooth

Class 2 Optical Accessories	Oval Lens	Softening Lens	Wall Washing Lens	Honey Comb	CCT Filter	UV FILTER	Gradient Filter	ND Filter
Class 3 Optical Accessories	Medium Snoot	Half Snoot	Full Snoot	Four Barndoor				

Elite Track Series


Light Distribution
Ra95 Typ./4000K

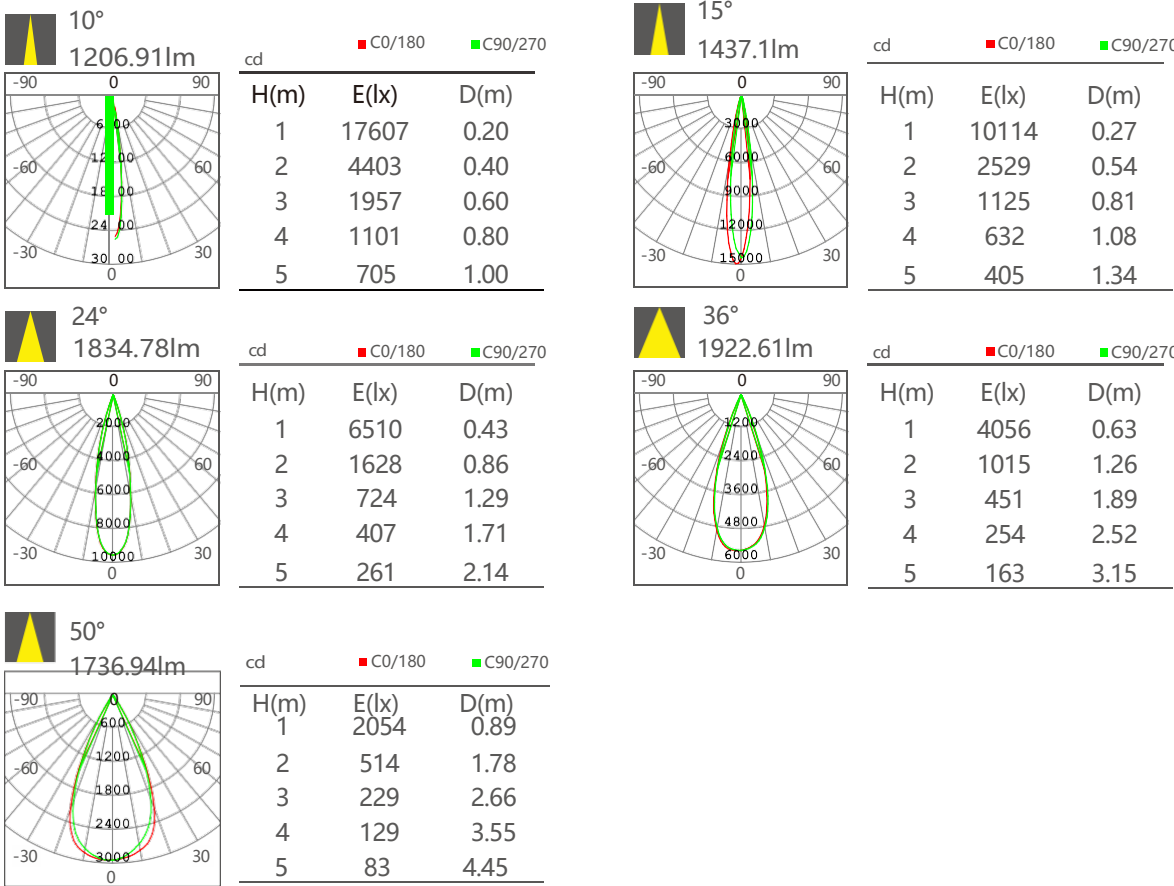

Elite Track Series



E7
Color
Color can be customized

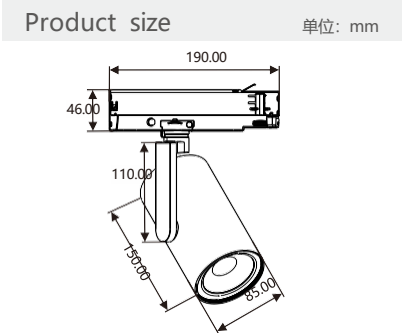

Product parameters

Model No.	Power	CCT	CRI	Beam Angle
E7	32W	2700K	ON/OFF Ra95 Typ. CCT ADJUSTABLE Ra95 Typ.	15°
		3000K		24°
		3500K		36°
		4000K		50°
		2700~5700K		

Installation Way



Installation Category

Recessed	Surface Mounted	Magnetic Track	Track Mounted	Integrated Driver
----------	-----------------	----------------	---------------	-------------------

Input Voltage DC 48V/AC 100-240V 50/60HZ


Control Way Dimming-Onboard/0-10V/DALI/DMX/CASAMBI/ZIGBEE/Bluetooth

Class 2 Optical Accessories									
	Oval Lens	Softening Lens	Wall Lens	Washing Lens	Honey Comb	CCT Filter	UV FILTER	Gradient Filter	ND Filter
Class 3 Optical Accessories									
	Medium Snoot	Half Snoot	Full Snoot	Four Barndoor					


Elite Track Series

Light Distribution


Ra95 Typ./4000K




H(m)	E(lx)	D(m)
1	18013	0.23
2	4504	0.46
3	2002	0.69
4	1127	0.92
5	721	1.15



H(m)	E(lx)	D(m)
1	13127	0.40
2	3282	0.79
3	1459	1.19
4	821	1.58
5	525	1.98



H(m)	E(lx)	D(m)
1	6490	0.56
2	1623	1.11
3	722	1.67
4	406	2.22
5	260	2.78



H(m)	E(lx)	D(m)
1	3538	0.79
2	885	1.57
3	394	2.36
4	222	3.14
5	142	3.93